



# Orange Pi Zero

It's an open-source single-board computer. It can run Android 4.4, Ubuntu, Debian. It uses the Allwinner H2 SoC, and has 256MB/512MB DDR3 SDRAM(256MB version is Standard version

## Top view

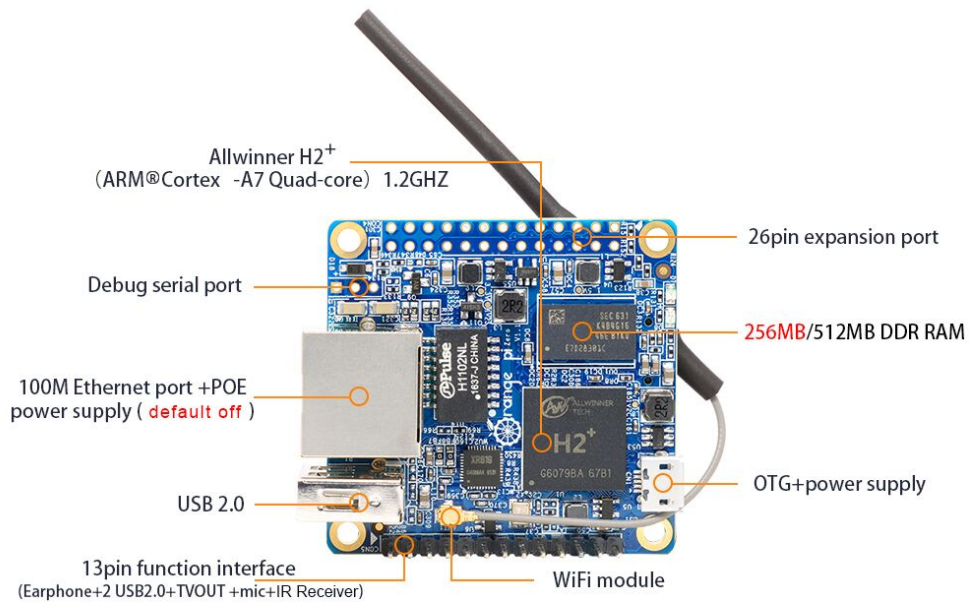

## Bottom view

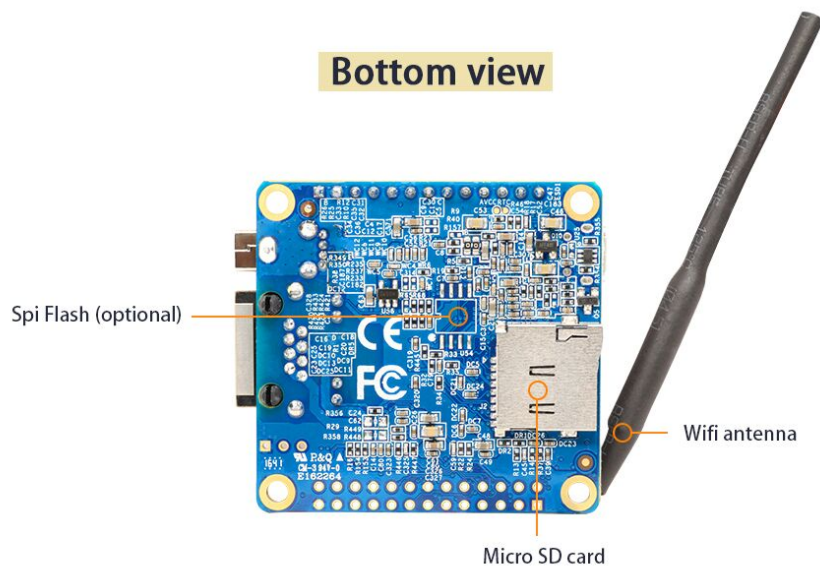

# What can I do with Orange Pi Zero?

Build...

- A computer
- A wireless server
- Games
- Music and sounds
- HD video
- A speaker
- Android
- Scratch
- Pretty much anything else, because Orange Pi Zero is open source

## Who's it for?

Orange Pi Zero is for anyone who wants to start creating with technology – not just consuming it. It's a simple, fun, useful tool that you can use to start taking control of the world around you.

Hardware specification	
CPU	H2 Quad-core <a href="#">Cortex-A7</a> H.265/HEVC 1080P.
GPU	·Mali400MP2 GPU @600MHz ·Supports OpenGL ES 2.0
Memory (SDRAM)	256MB/512MB DDR3 SDRAM(Share with GPU)(256MB version is Standard version)
Onboard Storage	TF card (Max. 32GB)/ Spi Flash
Onboard Network	<b>10/100M</b> Ethernet RJ45 POE is default off.
Onboard WIFI	XR819, IEEE 802.11 b/g/n
Audio Input	MIC
Video Outputs	Supports external board via 13pins

Power Source	USB OTG can supply power
USB 2.0 Ports	Only One USB 2.0 HOST, one USB 2.0 OTG
Buttons	Power Button
Low-level peripherals	26 Pins Header, compatible with Raspberry Pi B+ 13 Pins Header, with 2x USB, IR pin, AUDIO(MIC, AV)
LED	Power led & Status led
Supported OS	Android, Lubuntu, Debian, Raspbian
<b>Interface definition</b>	
Product size	48 mm × 46mm
Weight	26g