

IECEx Certificate of Conformity

INTERNATIONAL ELECTROTECHNICAL COMMISSION **IEC Certification System for Explosive Atmospheres**

for rules and details of the IECEx Scheme visit www.iecex.com

Certificate No.: **IECEx CQM 24.0057X** Page 1 of 3 Certificate history:

Issue No: 0 Status: Current

Date of Issue: 2025-01-10

Applicant: WAROM TECHNOLOGY INCORPORATED COMPANY

No. 555, Baoqian Road, Jiading District, Shanghai 201808

Equipment: **Explosion-proof Control Station typed BZC8050 Series**

Optional accessory:

Type of Protection: Flameproof enclosure "db", Increased safety "eb", Encapsulation "mb", Dust ignition protection by enclosure

Ji Xiaodong

Marking: Ex db eb IIC T6 Gb (Ta: -40°C/-60°C~+55°C)

Ex db eb mb IIC T6 Gb (Ta: -40°C/-60°C~+55°C)

Ex db eb IIC T6 Gb (Ta: -40°C/-60°C~+40°C)

Ex db eb mb IIC T6 Gb (Ta: -40°C/-60°C~+40°C)

Ex db eb IIC T5 Gb (Ta: -40°C/-60°C~+55°C)

Ex db eb mb IIC T5 Gb (Ta: -40°C/-60°C~+55°C)

Ex tb IIIC T80°C Db (Ta: -40°C/-60°C~+55°C)

Refer to the attachment for details.

Approved for issue on behalf of the IECEx

Certification Body:

President 2025-01-10 Position:

Signature:

(for printed version)

(for printed version)

This certificate and schedule may only be reproduced in full.

This certificate is not transferable and remains the property of the issuing body.
 The Status and authenticity of this certificate may be verified by visiting www.iecex.com or use of this QR Code.

Certificate issued by:

China Quality Mark Certification Group Co., Ltd. No. 33 Zengguang Road, Haidian District Beijing City, Postal code: 100048

China





IECEx Certificate of Conformity

Certificate No.: IECEx CQM 24.0057X Page 2 of 3

Date of issue: 2025-01-10 Issue No: 0

Manufacturer: WAROM TECHNOLOGY INCORPORATED COMPANY

No. 555, Baogian Road, Jiading District, Shanghai 201808

China

Manufacturing WAROM TECHNOLOGY locations: WAROM TECHNOLOGY INCORPORATED COMPANY

No. 555, Baoqian Road, Jiading District, Shanghai 201808

China

WAROM Technology Mena Fzco Plot No.S31223, Jebel Ali Free Zone

Dubai 263667
United Arab Emirates

This certificate is issued as verification that a sample(s), representative of production, was assessed and tested and found to comply with the IEC Standard list below and that the manufacturer's quality system, relating to the Ex products covered by this certificate, was assessed and found to comply with the IECEx Quality system requirements. This certificate is granted subject to the conditions as set out in IECEx Scheme Rules, IECEx 02 and Operational Documents as amended

STANDARDS:

The equipment and any acceptable variations to it specified in the schedule of this certificate and the identified documents, was found to comply with the following standards

IEC 60079-0:2017 Explosive atmospheres - Part 0: Equipment - General requirements

Edition:7.0

IEC 60079-1:2014 Edition:7.0 Explosive atmospheres - Part 1: Equipment protection by flameproof enclosures "d"

IEC 60079-18:2017

Explosive atmospheres - Part 18: Protection by encapsulation "m"

Edition:4.1

IEC 60079-31:2022 Explosive atmospheres – Part 31: Equipment dust ignition protection by enclosure "t"

Edition:3.0

IEC 60079-7:2017 Explosive atmospheres - Part 7: Equipment protection by increased safety "e"

Edition:5.1

This Certificate **does not** indicate compliance with safety and performance requirements other than those expressly included in the Standards listed above.

TEST & ASSESSMENT REPORTS:

A sample(s) of the equipment listed has successfully met the examination and test requirements as recorded in:

Test Report:

CN/CQM/ExTR24.0077/00

Quality Assessment Report:

CN/CQM/QAR07.0003/13



IECEx Certificate of Conformity

Certificate No.: IECEx CQM 24.0057X Page 3 of 3

Date of issue: 2025-01-10 Issue No: 0

EQUIPMENT:

Equipment and systems covered by this Certificate are as follows:

The enclosure cover of the BZC8050 series explosion-proof control station is made of GRP or stainless steel or carbon steel with powder coating or aluminum alloy with powder coating.

The enclosure and cover are sealed with gasket. The control station is optionally installed with control buttons, indicator lights, control switches, ammeters, voltmeters, terminals, drain plug (breather) and blanking element which are all separated certified Ex-components. Certified explosion-proof cable glands shall be installed by the user. The product fulfil the requirements of IP66 according to IEC 60529.

Refer to the attachment for details of Ex marking, ratings, nomenclature and list of the components covered by separated IECEx certificates which are optionally to be installed.

SPECIFIC CONDITIONS OF USE: YES as shown below:

- 1. When the ambient temperature is -40°C/-60°C~+40°C, it is suitable for the temperature group T6/T80°C, when the ambient temperature is -40°C/-60°C~ +55°C, it is suitable for temperature group T5/T80°C, when the ambient temperature is -40°C/-60°C~ +55°C and falls within the T6 temperature class, the maximum configuration is as follows: BZC8050-□-D3, BZC8050-□-A3, BZC8050-□-B1K1, BZC8050-□-A2D2, BZC8050-□-A2B1.
- 2. When the product is installed in explosive gas atmosphere, separated certified cable glands or blanking elements fulfil requirements of IEC 60079-0 and IEC 60079-7 with Ex marking Ex eb IIC Gb, IP66 shall be incorporated.
- 3. When the product is installed in combustible dust atmosphere, separated certified cable glands or blanking elements fulfil requirements of IEC 60079 and IEC 60079-31 with Ex marking Ex tb IIIC Gb, IP66 shall be incorporated.
- 4. For product with surface coating, measures shall be taken to avoid electrostatic accumulation when it is used in an environment of combustible dust.

Annex:

IECEx CQM 24.0057X attachment.pdf



Attachment to CoC IECEx CQM 24.0057X Issue 0



Manufacturer:

Warom Technology Incorporated Company

Address: No.555, Baoqian Road, Jiading, Shanghai, 201808, PRC

Electrical equipment:

Explosion-proof Control Station typed BZC8050-*-A*B*D*K*


Ex markings and ratings:

Rated	Rated	Ex-mark		Duete etien
operating	operating	60°C (40°C) - 1140°C	60%(40%)- 155%	Protection
voltage(V)	current(A)	-60℃(-40℃)~+40℃	-60℃(-40℃)~+55℃	Rating
Max.500V AC Max.220 DC	Max.16A			
	(only with	Ex db eb IIC T6 Gb	Ex db eb IIC T6/T5 Gb	
	BK8050)	Ex db eb mb IIC T6 Gb	Ex db eb mb IIC T6/T5 Gb	IP66
Max.440V AC	May 104	Ex tb IIIC T80℃ Db	Ex tb IIIC T80℃ Db	
Max.220V DC	Max.10A	Ex to file 100 c bb	EX ID IIIG 100 C DD	

Note: When the ambient temperature is -60 $^{\circ}$ C (-40 $^{\circ}$ C) to +55 $^{\circ}$ C and falls within the T6 temperature class, the maximum configuration is as follows: BZC8050- \square -D3, BZC8050- \square -A3, BZC8050- \square -B1K1, BZC8050- \square -A2D2, BZC8050- \square -A2B1.

Note: Protection type "mb" depends on the use of certified Ex component, the voltmeter. When the seal strip is made of polyurethane (PU) material, the ambient temperature is -40 $^{\circ}$ C $^{\circ}$ +40 $^{\circ}$ C (+55 $^{\circ}$ C); when the seal strip is made of silicone rubber, the ambient temperature is -60 $^{\circ}$ C $^{\circ}$ +40(+55 $^{\circ}$ C)

Nomenclature:

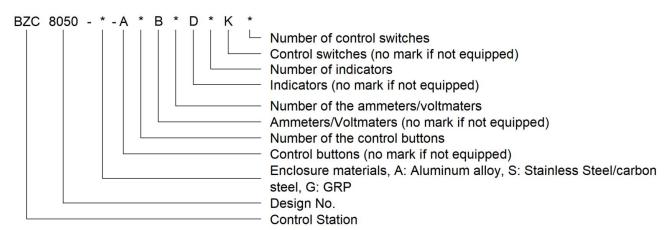

Postal code: 100048 Http:// www.cqm.com.cn Tel: +86 10 88411888



Attachment to CoC IECEx CQM 24.0057X Issue 0



List of the components covered by separated IECEx certificates which are optionally to be installed:

Components	Manufacturer	Туре	Certificate
Explosion-proof indicator	WAROM TECHNOLOGY INCORPORATED COMPANY	BD8060-	IECEx CQM 24.0019U
Explosion-proof indicator lampshade	WAROM TECHNOLOGY INCORPORATED COMPANY	BD8160-*	IECEx CQM 24.0018U
Terminal blocks	PHOENIX CONTACT GmbH & Co. KG	UK*/UT*	IECEx KEM 06.0034U IECEx KEM 06.0027U
Terminal blocks	Weidmüller Interface GmbH & Co. KG	WDU*	IECEx ULD 14.0005U
Terminal blocks	Connectwell Industries Pvt Ltd	CTS*	IECEx SIR 20.0046U
Terminal blocks	Weidmüller Interface GmbH & Co. KG	SAKK- series	IECEx TUR 18.0018U
Explosion-proof Ammeters/Voltmeters	WAROM TECHNOLOGY INCORPORATED COMPANY	BB8050-	IECEx TPS 22.0022U
Explosion-proof button operating device	WAROM TECHNOLOGY INCORPORATED COMPANY	BA8160-*	IECEx CQM 24.0017U
Explosion-proof button	WAROM TECHNOLOGY INCORPORATED COMPANY	BA8060-	IECEx CQM 24.0016U
Explosion-proof control switch	WAROM TECHNOLOGY INCORPORATED COMPANY	BK8050-*	IECEx CQM 11.0011U
Explosion-proof drain plug (breather)	WAROM TECHNOLOGY INCORPORATED COMPANY	BPS(H)-II	IECEx CQM 22.0023X
Stopping plug	WAROM TECHNOLOGY INCORPORATED COMPANY	BPT***	IECEx LCIE 15.0070U

Tel: +86 10 88411888