


JINGHAN SWITCH ELECTRONIC CO.,LTD

Attn: Mr John
 Tel: +86-574-83067530
 Mobile: +86-15867263600

Add: #102 65Building Dongying Xincun Ningbo City Zhejiang Province China
 Fax: +86-574-87972399
 E-mail: sales@jhswitch.com Website: <http://www.jhswitch.com>

JINGHAN ROCKER SWITCH KCD1-104 Series Datasheet

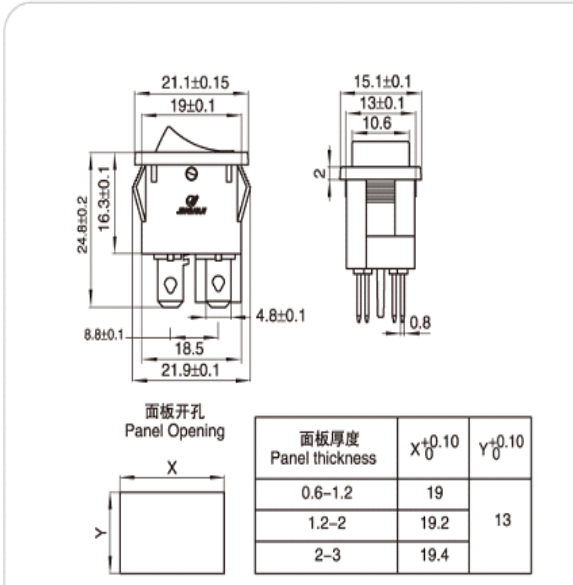

项目 Item	参数 Parameter
额定电流、电压 Rated voltage Rated current	6A 250V AC 10A 125V AC
绝缘电阻 Insulated resistance	≥ 100M Ω
接触电阻 Contact resistance	≤ 50m Ω
介电强度(极间) Dielectric strength	1500VAC/5S
电器寿命 Endurance	≥ 10000 Cycles
使用温度 Ambient temperature	T 85

系列号 Series No	电路图 Circuit diagram	端子规格 Terminal	开关标记 Making	颜色代码 Color code
KCD1-104	ON-OFF 	A 4.8 x 0.8	1 空白 No Making 2 O — 3 ●	K W Y R G O B
KCD1-104/N	ON-OFF 	L 1.2 x 0.8	4 米 米 5 O 6 L O Z O 7 客人要求	

Electronics specification	Expansion	British Called	American Called	Description	Symbol
SPST	Single pole, single throw	One-way	Two-way	A simple on-off switch. The two terminals are either connected together or disconnected from each other. An example is a light switch.	

JINGHAN SWITCH ELECTRONIC CO.,LTD

Attn: Mr John

Tel: +86-574-83067530

Mobile: +86-15867263600

Add: #102 65Building Dongying Xincun Ningbo City Zhejiang Province China

Fax: +86-574-87972399

E-mail: sales@jhswitch.com

Website: <http://www.jhswitch.com>

SPDT	Single pole, double throw	Two-way	Three-way	A simple changeover switch: C (COM, Common) is connected to L1 or to L2.	
DPST	Double pole, single throw	Double pole	Double pole	Equivalent to two SPST switches controlled by a single mechanism	
DPDT	Double pole, double throw			Equivalent to two SPDT switches controlled by a single mechanism.	

Description of JINGHAN SWITCH KCD1-104 Series Rocker Switch

Types:	ON-OFF ON-ON ON-OFF-ON (ON)-OFF (ON)-OFF-(ON)
Actuator :	Polycarbonate
Base :	Nylon(PA) 66
Contacts :	Silver plated Copper / Silver Alloyed
Movable Arm :	Tin-Plated Copper
Terminals :	Tin-Plated Copper
Ratings :	6A125V 10A250V
Dielectric Strength :	1500V for 1 Min
Insulation Resistance :	≥100MΩ
Contact Resistance :	≤30mΩ
Temperature Range :	-30~85℃
Life :	≥10000times
Lamp Color:	K(Black) / W / Y / R / G / O / B
Lamp Voltage:	12V / 24V / 36V / 110V / 220V
ROHS:	YES
CE:	YES
TUV:	YES