



# JVS-N513-DS-Z5

5MP Varifocal IP Camera



## Features

- 1/2.8" SONY Progressive Scan CMOS
- 5.0 Megapixel, 30fps@2592\*1944
- 2.7-13.5mm(Motorized), 2pcs IR Array LED for 60M, IR ON 0Lux,
- Support ONVIF Profile S, FTP, RTSP, UPnP etc.
- Support Dual-Stream, Heartbeat Mechanism, 3D-DNR, Defogging, D-WDR, Lens Correction, Corridor Monitoring etc.
- RJ45, DC 12V, Easy-to-install bracket included
- Option: SD card slot, Alarm I/O, Audio I/O, RS485

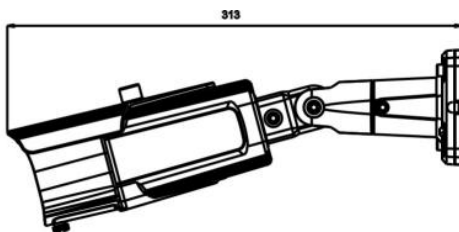

## Specifications

Video	
Image Sensor	1/2.8" Progressive Scan CMOS
Max Resolution	2592×1944
Effective Pixels	5MP
Compression Standard	H.265/H.264/MJPEG
Bit Rate	30Kbps~16Mbps
Bitrate control method	CBR/VBR
Lens	
Lens	2.7-13.5mm
Lens Type	Motorized
Function	
Image automatic adjustment function	AEC/AWB/AGC
Image Adjustments	Color saturation, brightness, contrast, hue, sharpness, Gamma, D-WDR
Others	Anti Fogging/Anti Trembling/IR Detection
Image set	Flip / Mirror
Video character overlay	Support
Privacy Mask	4 Zone
Micro SD	Max 128G
Alarm I/O	1x alarm input, 1x alarm output
RS485	1xRS485 interface
Audio	1 input (3.5mm AV interface), 1 output (3.5mm AV interface)
Audio compression format	G.711A/G.711U/G.726
Two-way Audio	Support
NETWORK	
Ethernet	RJ45(10M/100M BASE-TX)
Protocols	TCP/IP、UDP、RTP、RTSP、RTCP、HTTP、DNS、DDNS、DHCP、FTP、NTP、PPPOE、SMTP、UPNP
Alarm output	E-mail/FTP upload
Application Programming Interface	ONVIF( Profile S)
Browser	IE 10 above
Max. User Access	Max 5
GENERAL	
Power	DC12V ±10% (support PoE)
Environmental Casing	Aluminum Alloy Housing, Indoor and Outdoor Applicable
Installation	Ceiling Mounted & Wall Mounted
Power Consumption	<12w(IR ON)
Operating Temperature	-30 ° C ~ 60 ° C
Operating Humidity	0% -85% RH
Dimensions	L313xW101xH70mm
Weight	965g