

# JVS-ND7932-DV(R2 version)

32CH H.265 4xSATA NVR

## Specifications


Model	JVS-ND7932-DV(R2)
<b>Video &amp; Audio</b>	
<b>IP Camera Input</b>	32 Channel
<b>Video Output</b>	HDMI: 3840*2160/2560*1440/1920x1080/ 1440x900/ 1280x1024/ 1280x720/ 1024x768 VGA: 1920x1080/1440*900/1280*1024/1280*720/1024*768
<b>Audio In &amp; Out</b>	Support
<b>Compression</b>	H.265/ H.264
<b>Video Access</b>	32CH 5.0MP
<b>Storage</b>	
<b>SATA</b>	4x SATA Interface
<b>Capacity</b>	Up to 10TB Max.
<b>File Format</b>	Log: *.txt/ Picture: *.JPG/ Video: *.mp4
<b>Backup Mode</b>	USB Device FAT32
<b>Video</b>	
<b>Video Playback</b>	Auto/ Timing/ Alarm/ Motion Detection/ Intelligent Analysis
<b>Sync Playback</b>	2CH 5.0MP / 3CH 4.0MP/ 3CH 3.0MP/ 4CH 2.0MP
<b>Search Mode</b>	Channel Number/ Recording Type/ Date
<b>Network</b>	
<b>Ethernet</b>	10M/100M/1000Mbps Adaptive
<b>Max. Remote Channels</b>	32 LAN/ 16 WAN
<b>Network Function</b>	TCP/IP, UDP, SMTP, NTP, DHCP
<b>Interoperability</b>	ONVIF 2.4, CloudSEE 2.0
<b>Smart Phone</b>	iPhone, Android
<b>Hardware</b>	
<b>Network Interface</b>	2x RJ45
<b>USB Interface</b>	3x USB2.0
<b>PTZ Interface</b>	RS485
<b>Controlling Device</b>	Mouse
<b>Alarm Input</b>	6CH
<b>Alarm Output</b>	1CH
<b>Special</b>	
<b>Multi-Screen Display</b>	1/ 4/ 5/ 6 up to 32
<b>Alarm Method</b>	Buzzer, Push to App, Email Alarm, External Alarm
<b>Digital Zoom</b>	Support
<b>Two-Way Talk</b>	Support
<b>Alarm Snapshot</b>	Support
<b>Intelligent Analysis</b>	Support Region Intrusion, Line Crossing, Crowd Density, Fast Moving, Scene Change, People Counting, Video Tampering, Defocus Detection
<b>General</b>	
<b>Power Supply</b>	DC 12V
<b>Consumption</b>	≤ 20 W (Without HDD)
<b>Working Temperature</b>	-10°C ~ 55°C
<b>Working Humidity</b>	10% ~ 90%
<b>Dimensions</b>	445*45*320(mm)
<b>Weight</b>	≤5Kg (Without HDD)



## Key features

- Adopt the new Vstar GUI , easy to operate and run smoothly
- Support 4K output
- Support 32Ch 5.0Megapixel IP Cameras
- Support Audio Input and Output;
- Support alarm input and output 6 In 1 out
- Support 4x SATA , up to 10TB each
- Support RS485
- Support intelligent analysis

## Description

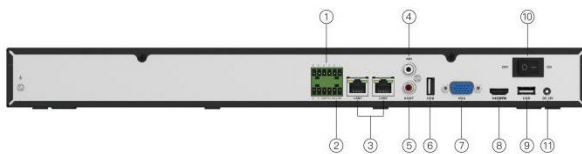

Index	Description	Index	Description
①	Alarm In/Out	⑦	VGA
②	RS-485	⑧	HDMI
③	RJ45	⑨	USB 2.0
④	Audio In	⑩	Switch
⑤	Audio Out	⑪	Power
⑥	USB 2.0		