

# JVS-ND9164-HZ(R2 version)

64CH H.265 NVR

## Specifications


Model	JVS-ND9164-HZ-R2
<b>Video &amp; Audio</b>	
<b>IP Camera Input</b>	64 Channel
<b>Video Output</b>	HDMI: 4K@60Hz/ 4K@30Hz/ 2K@60Hz/ 2K@30Hz/ 1920x1080/ 1440x900/ 1280x1024/ 1280x720/ 1024x768 VGA: 1920x1080
<b>Audio In &amp; Out</b>	Support
<b>Compression</b>	H.265/ H.264
<b>Video Access</b>	64CH 5.0MP/ 8CH 8.0MP
<b>Storage</b>	
<b>SATA</b>	8x SATA Interface
<b>Capacity</b>	Up to 10TB Max.
<b>File Format</b>	Log: *.txt/ Picture: *.JPG/ Video: *.mp4
<b>Backup Mode</b>	USB 3.0 Device FAT32/ NTFS/ exFAT
<b>Video</b>	
<b>Video Playback</b>	Auto/ Timing/ Alarm/ Motion Detection/ Intelligent Analysis
<b>Sync Playback</b>	9CH 5.0MP (20fps)/ 11CH 4.0MP/ 13CH 3.0MP/ 16CH 2.0MP
<b>Search Mode</b>	Channel Number/ Recording Type/ Date
<b>Network</b>	
<b>Ethernet</b>	100/1000Mbps
<b>Max. Remote Channels</b>	128 LAN/ 64 WAN
<b>Network Function</b>	TCP/IP, UDP/IP, CloudSEE, SMTP, NTP, DHCP
<b>Interoperability</b>	ONVIF 2.4, CloudSEE 2.0
<b>Smart Phone</b>	iPhone, Android
<b>Hardware</b>	
<b>Network Interface</b>	2x RJ45
<b>USB Interface</b>	2x USB2.0, 1xUSB3.0
<b>PTZ Interface</b>	RS485
<b>Controlling Device</b>	Mouse
<b>Alarm Input</b>	16CH
<b>Alarm Output</b>	4CH
<b>Special</b>	
<b>Multi-Screen Display</b>	1/ 4/ 5/ 6 up to 64
<b>Alarm Method</b>	Buzzer, Push to App, Email Alarm, External Alarm
<b>Digital Zoom</b>	Support
<b>Two-Way Talk</b>	Support
<b>Alarm Snapshot</b>	Support
<b>Intelligent Analysis</b>	Support Region Intrusion, Line Crossing, Crowd Density, Fast Moving, Scene Change, People Counting, Video Tampering, Defocus Detection
<b>General</b>	
<b>Power Supply</b>	ATX
<b>Consumption</b>	≤ 30 W (Without HDD)
<b>Working Temperature</b>	-10°C ~ 55°C
<b>Working Humidity</b>	10% ~ 90%
<b>Dimensions</b>	445x90.5x430(mm)
<b>Weight</b>	≤ 8Kg (Without HDD)



## Key features

- Adopt the new Vstar GUI , easy to operate and run smoothly
- Support 4K output
- Support 64Ch 5.0Megapixel IP Cameras
- Support audio input and output;
- Support Alarm Input and Output 16 In 4 Out
- Support 8x SATA , Up to10TB each
- Support RS485
- With Digital Zoom, Privacy Mask Functions
- Support Intelligent Analysis( Region Intrusion, Line Crossing, Crowd Density, Fast Moving, Scene Change, People Counting, Video Tampering, Defocus Detection,etc.)

## Description

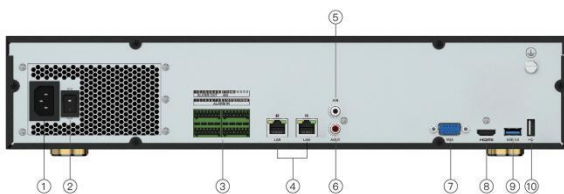

Index	Description	Index	Description
①	Power In	⑥	Audio Out
②	On-Off	⑦	VGA
③	Alarm/RS485	⑧	HDMI
④	RJ45	⑨	USB 3.0
⑤	Audio In	⑩	USB