

JVS-ND7932-HV(R2 version)


32CH H.265 2xSATA NVR



Key features

- Adopt the new Vstar GUI , easy to operate and run smoothly
- Support 4K output
- Supports 32Ch 5.0Megapixel IP Cameras
- Support 2CH 5MP / 3CH 4MP / 3CH 3MP / 4CH 2MP playback;
- Support audio input and output;
- Two SATA Support, up to 10TB each;
- Supports 485
- Support intelligent analysis

Description

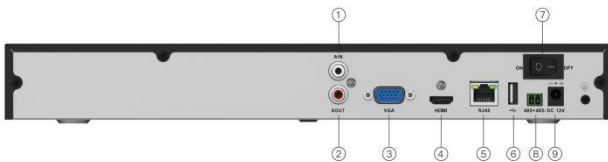

Index	Description	Index	Description
①	Audio In	⑥	USB
②	Audio Out	⑦	Switch
③	VGA	⑧	RS-485
④	HDMI	⑨	Power
⑤	RJ45		

Specifications

Model	JVS-ND7932-HV-R2
Video and Audio	
IP Camera Input	32 Channel
Video Output	HDMI: 3840×2160, 1920×1080, 2560×1440, 1440×900, 1280×1024, 1280×720, 1024×768
	VGA: 1920×1080, 1440×900, 1280×1024, 1280×720, 1024×768
Audio In & Out	Support
Compression	H.265/ H.264
Video Access	32CH 5.0MP
Storage	
SATA	2x SATA Interface
Capacity	Up to 10TB Max.
File Format	Log: *.txt/ Picture: *.JPG/ Video: *.mp4
Backup Mode	USB Device FAT32
Video	
Video Playback	Auto/ Timing/ Alarm/ Motion Detection/Intelligent Analysis
Sync Playback	2CH 5.0MP / 3CH 4.0MP/ 3CH 3.0MP/ 4CH 2.0MP
Search Mode	Channel Number/ Recording Type/ Date
Network	
Ethernet	10M/100M/1000Mbps Adaptive
Max.Remote Channels	16 WAN/32 LAN
Network Function	TCP/IP, DHCP, UDP, SMTP, NTP
Interoperability	ONVIF Standard
Smart Phone	iPhone, Android
Hardware	
Network Interface	1x RJ45
USB Interface	2x USB2.0
PTZ Interface	RS485
Controlling Device	Mouse
Alarm Input	Not Support
Alarm Output	Not Support
Special	
Multi-Screen Display	1/ 4/ 5/ 6 up to 32
Alarm Method	Buzzer, Push to App, Email Alarm
Digital Zoom	Support
Two-Way Talk	Support
Alarm Snapshot	Support
Intelligent Analysis	Support Region Intrusion, Line Crossing, Crowd Density, Fast Moving, Scene Change, People Counting, Video Tampering, Defocus Detection
General	
Power Supply	DC 12V
Consumption	≤ 15 W (Without HDD)
Working Temperature	-10°C~ 55°C
Working Humidity	10 % ~ 90 %
Dimensions	360X45X264mm
Weight	≤ 2.0kg (Without HDD)