

# JVS-H302-A2


2MP Wi-Fi Bullet IP Camera



## Key Features

- Resolution 1920x1080
- With IR LED, Monitoring day and night
- Dual Antenna 2.4Ghz Wi-Fi and 10/100M RJ45 Port
- Supports smartphone remote viewing
- Ingress Protection IP66
- Support 128GB SD Card
- Two-Way Talk Support

## Dimensions(mm)

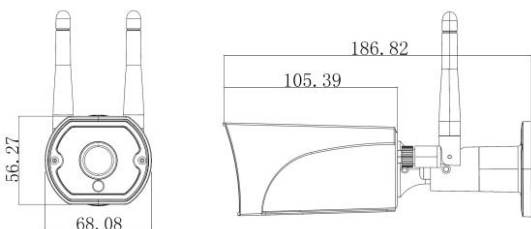

## Specifications

| Model                  | JVS-H302-A2  |
|------------------------|--|
| <b>Video</b>           |  |
| Image Sensor           | 1/ 2.7" CMOS Sensor  |
| Max Resolution         | 1920x1080  |
| Effective Pixels       | 2.0MP  |
| Compression Standard   | H.265  |
| Framerate              | 20fps  |
| Bitrate                | 40~8192Kbps  |
| SNR (dB)               | 40db   |
| Illumination           | 0Lux (IR ON)   |
| <b>Lens</b>            |  |
| Lens                   | 4mm  |
| Viewing Angle          | H 87.4°, V 47°, D: 104°  |
| IR-LEDs                | 18x LEDs   |
| IR-Distance            | Up to 15m  |
| <b>Function</b>        |  |
| Privacy Masking        | Supports 4 Zone masking  |
| Exposure Mode          | Auto   |
| Automatic Gain Control | Auto   |
| White Balance          | Auto   |
| Image Enhancement      | AGC/ AWB/ AEC/ 3D DNR  |
| Motion Detection       | Support  |
| Two-Way Talk           | Support  |
| Remote Control         | System Management, Audio/Video Management, Image Management, Storage Management, Alarm Management, Network Management. |
| Triggered Events To    | Client, Email, Phone   |
| <b>Interface</b>       |  |
| Audio In & Out         | Built-in Mic and Speaker   |
| SD Card                | Support Max. 128GB   |
| Reset Switch           | Support  |
| <b>Network</b>         |  |
| Ethernet               | 10M/100M Ethernet, RJ45 Port   |
| Wi-Fi                  | Wi-Fi (IEEE802.11b/g/n), 2.4Ghz  |
| Stream                 | 2x Streams   |
| Protocols              | HTTP, TCP/IP, UDP, ICMP, DHCP, DNS   |
| LAN                    | Support  |
| Network Transmission   | CloudSEE P2P Transmission Protocol   |
| <b>General</b>         |  |
| Power Supply           | DC12V/1A   |
| Consumption            | Day ≤3W; Night ≤6W   |
| Working Temperature    | -20°C~55°C   |
| Humidity               | Rh 10%~90%   |
| Material               | Aluminum & Plastic   |
| Dimensions             | 186.82x56.27x68.08mm   |
| Weights                | 350g   |
| Installation           | Wall, Ceiling Bracket Mounting   |