


Product data sheet

Specifications

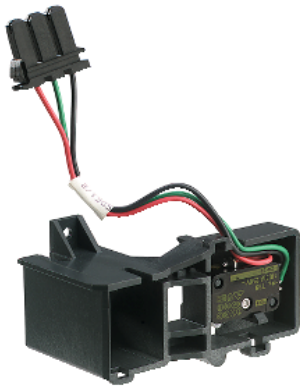

auxiliary contact SDE - 6 A - 1 NO/ NC - for Masterpact NW

47915

Main

Device short name	SDE
Product or component type	Auxiliary contact
Device application	Connection
Range compatibility	Masterpact NW circuit breaker
Signal contacts composition	1 NO/NC

Complementary

Auxiliary contacts type	Standard
[I _{th}] conventional free air thermal current	6 A
[I _e] rated operational current	AC-12: 3 A at 690 V AC 50/60 Hz DC-12: 3 A at 24/48 V DC AC-12: 5 A at 240/380 V AC 50/60 Hz AC-12: 5 A at 480 V AC 50/60 Hz DC-12: 0.15 A at 250 V DC DC-12: 0.3 A at 125 V DC
Minimum load	100 mA at 24 V
Accessory / separate part category	Spare parts for Masterpact NW

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Weight	48 g
Package 1 Height	5 cm
Package 1 width	12 cm
Package 1 Length	16 cm
Unit Type of Package 2	BB1
Number of Units in Package 2	4
Package 2 Weight	260 g
Package 2 Height	6 cm
Package 2 width	17.7 cm
Package 2 Length	27 cm

Unit Type of Package 3	S03
Number of Units in Package 3	32
Package 3 Weight	2.52 kg
Package 3 Height	30 cm
Package 3 width	30 cm
Package 3 Length	40 cm

Offer Sustainability

REACH free of SVHC	Yes
EU RoHS Directive	Compliant EU RoHS Declaration
Toxic heavy metal free	Yes
Mercury free	Yes
RoHS exemption information	Yes
China RoHS Regulation	China RoHS declaration Pro-active China RoHS declaration (out of China RoHS legal scope)

Contractual warranty

Warranty	18 months
----------	-----------