



OWNER'S MANUAL

ADV350A



This manual should be considered a permanent part of the vehicle and should remain with the vehicle when it is resold.

This publication includes the latest production information available before printing. Honda Motor Co., Ltd. reserves the right to make changes at any time without notice and without incurring any obligation.

No part of this publication may be reproduced without written permission.

The vehicle pictured in this owner's manual may not match your actual vehicle.

Welcome

Congratulations on your purchase of a new Honda vehicle. Your selection of a Honda makes you part of a worldwide family of satisfied customers who appreciate Honda's reputation for building quality into every product.

To ensure your safety and riding pleasure:

- Read this owner's manual carefully.
- Follow all recommendations and procedures contained in this manual.
- Pay close attention to safety messages contained in this manual and on the vehicle.

- The following codes in this manual indicate each destination.
- The illustrations here in are based on the ADV350A KO type.

Destination Codes

Code	Destination
------	-------------

ADV350A

FO, III FO	Taiwan
III HK	Hong Kong
KO	Korea
MA	Malaysia
III SI	Singapore
TH, III TH	Thailand

*The specifications may vary with each locale.

A Few Words About Safety

Your safety, and the safety of others, is very important. Operating this vehicle safely is an important responsibility.

To help you make informed decisions about safety, we have provided operating procedures and other information on safety labels and in this manual. This information alerts you to potential hazards that could hurt you or others.

Of course, it is not practical or possible to warn you about all hazards associated with operating or maintaining a vehicle. You must use your own good judgement.

You will find important safety information in a variety of forms, including:

- Safety labels on the vehicle
- Safety Messages preceded by a safety alert symbol  and one of three signal words: DANGER, WARNING, or CAUTION. These signal words mean:

DANGER

You **WILL** be **KILLED** or **SERIOUSLY HURT** if you don't follow instructions.

WARNING

You **CAN** be **KILLED** or **SERIOUSLY HURT** if you don't follow instructions.

CAUTION

You **CAN** be **HURT** if you don't follow instructions.

Other important information is provided under the following titles:

NOTICE

Information to help you avoid damage to your vehicle, other property, or the environment.

Contents

Vehicle Safety

P. 2

Operation Guide

P. 18

Maintenance

P. 89

Troubleshooting

P. 123

Information

P. 147

Specifications

P. 166

Vehicle Safety

This section contains important information for safe riding of your vehicle.
Please read this section carefully.

Safety Guidelines	P. 3
Image Labels	P. 6
Safety Precautions	P. 11
Riding Precautions	P. 12
Accessories & Modifications	P. 16
Loading	P. 17

Safety Guidelines

Follow these guidelines to enhance your safety:

- Perform all routine and regular inspections specified in this manual.
- Stop the engine and keep sparks and flames away before filling the fuel tank.
- Do not run the engine in enclosed or partly enclosed areas. Carbon monoxide in exhaust gases is toxic and can kill you.

Always Wear a Helmet

It's a proven fact: helmets and protective apparel significantly reduce the number and severity of head and other injuries. So always wear an approved helmet and protective apparel. 📖 P. 11

Before Riding

Make sure that you are physically fit, mentally focused, and free of alcohol and drugs. Check that you and your passenger are both wearing an approved helmet and protective apparel. Instruct your passenger on holding onto the grab rails or your waist, leaning with you in turns, and keeping their feet on the footpegs, even when the vehicle is stopped.

Take Time to Learn & Practice

Even if you have ridden other vehicles, practice riding in a safe area to become familiar with how this vehicle works and handles, and to become accustomed to the vehicle's size and weight.

Ride Defensively

Always pay attention to other vehicles around you, and do not assume that other drivers see you. Be prepared to stop quickly or perform an evasive maneuver.

Make Yourself Easy to See

Make yourself more visible, especially at night, by wearing bright reflective clothing, positioning yourself so other drivers can see you, signaling before turning or changing lanes, and using your horn when necessary.

Ride within Your Limits

Never ride beyond your personal abilities or faster than conditions warrant. Fatigue and inattention can impair your ability to use good judgement and ride safely.

Don't Drink or Use Drugs and Ride

Alcohol or drugs and riding don't mix. Even one alcoholic drink can reduce your ability to respond to changing conditions, and your reaction time gets worse with every additional drink. The same is true for drug use. Don't drink or use and ride, and don't let your friends do it either.

Keep Your Honda in Safe Condition

It's important to keep your vehicle properly maintained and in safe riding condition. Inspect your vehicle before every ride and perform all recommended maintenance. Never exceed load limits (➤ P. 17), and do not modify your vehicle or install accessories that would make your vehicle unsafe (➤ P. 16).

If You are Involved in a Crash

Personal safety is your first priority. If you or anyone else has been injured, take time to assess the severity of the injuries and whether it is safe to continue riding. Call for emergency assistance if needed. Also follow applicable laws and regulations if another person or vehicle is involved in the crash.

If you decide to continue riding, first turn the ignition switch to the **O** (Off) position, and evaluate the condition of your vehicle. Inspect for fluid leaks, check the tightness of critical nuts and bolts, and check the handlebar, control levers, brakes, and wheels. Ride slowly and cautiously.

Your vehicle may have suffered damage that is not immediately apparent. Have your vehicle thoroughly checked at a qualified service facility as soon as possible.

Carbon Monoxide Hazard

Exhaust contains poisonous carbon monoxide, a colourless, odorless gas. Breathing carbon monoxide can cause loss of consciousness and may lead to death.

If you run the engine in a confined or even partly enclosed area, the air you breathe could contain a dangerous amount of carbon monoxide.

Never run your vehicle inside a garage or other enclosure.

⚠ WARNING

Running the engine of your vehicle while in an enclosed or even partially enclosed area can cause a rapid build-up of toxic carbon monoxide gas.

Breathing this colourless, odorless gas can quickly cause unconsciousness and lead to death.

Only run your vehicle's engine when it is located in a well ventilated area outdoors.

Image Labels

The following pages describe the label meanings. Some labels warn you of potential hazards that could cause serious injury. Others provide important safety information. Read this information carefully and don't remove the labels.

If a label comes off or becomes hard to read, contact your dealer for a replacement.

There is a specific symbol on each label. The meanings of each symbol and label are as follows.



Read instructions contained in Owner's Manual carefully.



Read instructions contained in Shop Manual carefully. In the interest of safety, take the vehicle to be serviced only by your dealer.



DANGER (with RED background)

You **WILL** be **KILLED** or **SERIOUSLY HURT** if you don't follow instructions.

WARNING (with ORANGE background)

You **CAN** be **KILLED** or **SERIOUSLY HURT** if you don't follow instructions.

CAUTION (with YELLOW background)

You **CAN** be **HURT** if you don't follow instructions.




BATTERY LABEL DANGER

- Keep flame and spark away from the battery. Battery produce explosive gas that can cause explosion.
- Wear the eye protection and rubber gloves when handling the battery, or you can get burned or lose your eyesight by the battery electrolyte.
- Do not allow children and other people to touch a battery unless they understand proper handling and hazards of the battery very well.
- Handle the battery electrolyte with extreme care as it contains dilute sulfuric acid. Contact with your skin or eyes can burn you or cause loss of your eyesight.
- Read this manual carefully and understand it before handling the battery. Neglect of the instructions can cause personal injury and damage to the vehicle.
- Do not use a battery with the electrolyte at or below the lower level mark. It can explode causing serious injury.


**RADIATOR CAP LABEL****DANGER****FO/III FO/III HK type**

NEVER OPEN WHEN HOT.

Hot coolant will scald you.

Relief pressure valve begins to open at **1.1 kgf/cm²**.**ACCESSORIES AND LOADING WARNING LABEL**
WARNING**III HK type****ACCESSORIES AND LOADING**

- The safety stability and handling of this vehicle may be affected by the addition of accessories and luggage.
- Read carefully the instructions contained in user's manual and installation guide before installing any accessory.
- The total weight of accessories and luggage added to rider's and passenger's weight should not exceed **180 kg (397 lb)**, which is the maximum weight capacity.
- The luggage weight must not exceed **16.5 kg (36 lb)** under any circumstances.
- The fitting of large fork-mounted or large handlebar mounted fairing is not recommended.

**TYRE INFORMATION LABEL**

FO/III FO/III HK/MA/III SI type

Cold tyre pressure:

[Driver only]

Front **200 kPa (2.00 kgf/cm², 29 psi)**Rear **225 kPa (2.25 kgf/cm², 33 psi)**

[Driver and passenger]

Front **200 kPa (2.00 kgf/cm², 29 psi)**Rear **225 kPa (2.25 kgf/cm², 33 psi)****SAFETY REMINDER LABEL**

FO/III FO/III HK/MA/III SI type

For your protection, always wear helmet, protective apparel.

FUEL LABEL

FO/III FO/III HK/MA/III SI type

Unleaded petrol only

ETHANOL up to 10 % by volume



CARGO LIMIT LABEL

FO/III FO/III HK/MA type

Do not exceed **10 kg (22 lb)**.



CARGO LIMIT LABEL

FO/III FO/III HK/MA type

Do not exceed **1.5 kg (3.3 lb)**.

Safety Precautions

- Ride cautiously and keep your hands on the handlebar and feet on the step board.
- Instruct your passenger to keep their hands on the grab rails or your waist and their feet on the footpegs while riding.
- Always consider the safety of your passenger, as well as other drivers and riders.

Protective Apparel

Make sure that you and any passenger are wearing an approved helmet, eye protection, and high-visibility protective clothing. Avoid wearing loose clothes that could get caught on any part of the vehicle. Ride defensively in response to weather and road conditions.

■ Helmet

Safety-standard certified, high-visibility, correct size for your head

- Must fit comfortably but securely, with the chin strap fastened

- Face shield with unobstructed field of vision or other approved eye protection

⚠ WARNING

Not wearing a helmet increases the chance of serious injury or death in a crash.

Make sure that you and any passenger always wear an approved helmet and protective apparel.

■ Gloves

Full-finger leather gloves with high abrasion resistance

■ Boots or Riding Shoes

Sturdy boots with non-slip soles and ankle protection

■ Jacket and Trousers

Protective, highly visible, long-sleeved jacket and durable trousers for riding (or a protective suit)

Riding Precautions

Running-in Period

During the first 500 km (300 miles) of running, follow these guidelines to ensure your vehicle's future reliability and performance.

- Avoid full-throttle starts and rapid acceleration.
- Avoid hard braking.
- Ride conservatively.

Brakes

Observe the following guidelines:

- Avoid excessively hard braking.
 - ▶ Sudden braking can reduce the vehicle's stability.
 - ▶ Where possible, reduce speed before turning; otherwise you risk sliding out.
- Exercise caution on low traction surfaces.
 - ▶ The tyres slip more easily on such surfaces and braking distances are longer.
- Avoid continuous braking.
 - ▶ Repeated braking, such as when descending long, steep slopes can seriously overheat the brakes, reducing their effectiveness.
- For full braking effectiveness, operate both the front and rear brakes together.

■ Anti-lock Brake System (ABS)

This model is equipped with an Anti-lock Brake System (ABS) designed to help prevent the brakes from locking up during hard braking.

- ABS does not reduce braking distance. In certain circumstances, ABS may result in a longer stopping distance.
- ABS does not function at speeds below 10 km/h (6 mph).
- The brake levers may recoil slightly when applying the brakes. This is normal.
- Always use the recommended front/rear tyres to ensure correct ABS operation.

■ Wet or Rainy Conditions

Road surfaces are slippery when wet, and wet brakes further reduce braking efficiency. Exercise extra caution when braking in wet conditions.

If the brakes get wet, apply the brakes while riding at low speed to help them dry.

Parking

- Park on a firm, level surface.
- If you must park on a slight incline or loose surface, park so that the vehicle cannot move or fall over.
- Make sure that high-temperature parts cannot come into contact with flammable materials.
- Do not touch the engine, muffler, brakes and other high-temperature parts until they cool down.
- To reduce the likelihood of theft, always lock the handlebar, lock the ignition switch (➡ P. 51) and leave your vehicle while taking the Honda SMART Key with you. Deactivate the Honda SMART Key system if necessary.

➡ P. 46

Use of an anti-theft device is also recommended.

Except FO/III FO type

Also set the anti-theft alarm system.

I Parking with the Side Stand or Centre Stand

1. Stop the engine.

2. **Using the side stand**

Push the side stand down.

Slowly lean the vehicle to the left until its weight rests on the side stand.

Using the centre stand

To lower the centre stand, stand on the left side of the vehicle.

Hold the left handle grip and the left grab rail.

Press down on the tip of the centre stand with your right foot and, simultaneously, pull up and back.

3. Turn the handlebar fully to the left.
▶ Turning the handlebar to the right reduces stability and may cause the vehicle to fall.
4. Turn the ignition switch to the  (Lock) position (➡ P. 44) and lock the ignition switch (➡ P. 51).
5. **Except FO/III FO type**
Set the anti-theft alarm system. ➡ P. 54

Refuelling and Fuel Guidelines

Follow these guidelines to protect the engine, fuel system and catalytic converter:

- Use only unleaded petrol.
- Use the recommended octane number.
Using lower octane petrol will result in decreased engine performance.
- Do not use fuels containing a high concentration of alcohol. ➡ P. 164
- Do not use stale or contaminated petrol or an oil/petrol mixture.
- Avoid getting dirt or water in the fuel tank.

Honda Selectable Torque Control

When the Honda Selectable Torque Control (Torque Control) detects rear wheel spin during acceleration, the system will limit the amount of torque applied to the rear wheel based on the Torque Control level selected.

Torque Control will allow some wheel spin during acceleration at the lower Torque Control setting levels. Select a level that is appropriate for your skill and riding conditions.

Torque Control does not work during deceleration and will not prevent the rear wheel from skidding due to engine braking. Do not close the throttle suddenly, especially when riding on slippery surfaces.

Torque Control may not compensate for rough road conditions or rapid throttle operation.

Always consider road and weather conditions, as well as your skills and condition, when applying throttle.

If your vehicle gets stuck in mud, snow, or sand, it may be easier to free it by turning off the Torque Control temporarily.

Temporarily turning off Torque Control also may help you maintain control and balance when riding on off-road terrain.

Always use the recommended tyres and the Honda Genuine Parts for drive system such as the drive belt and weight rollers, to ensure correct Torque Control operation.

Accessories & Modifications

We strongly advise that you do not add any accessories that were not specifically designed for your vehicle by Honda or make modifications to your vehicle from its original design. Doing so can make it unsafe. Modifying your vehicle may also void your warranty and make your vehicle illegal to operate on public roads. Before deciding to install accessories on your vehicle, be certain the modification is safe and legal.

WARNING

Improper accessories or modifications can cause a crash in which you can be seriously hurt or killed.

Follow all instructions in this owner's manual regarding accessories and modifications.

Do not pull a trailer with, or attach a sidecar to, your vehicle. Your vehicle was not designed for these attachments, and their use can seriously impair your vehicle's handling.

Loading

- Carrying extra weight affects your vehicle's handling, braking and stability. Always ride at a safe speed and never exceed 130 km/h (80 mph) for the load you are carrying.

- Avoid carrying an excessive load and keep within specified load limits.

Maximum weight capacity / Maximum luggage weight ➤ P. 166


- Tie all luggage securely, evenly balanced, and close to the centre of the vehicle.
- Do not place objects near the lights or the muffler.


WARNING

Overloading or improper loading can cause a crash and you can be seriously hurt or killed.

Follow all load limits and other loading guidelines in this manual.

Parts Location

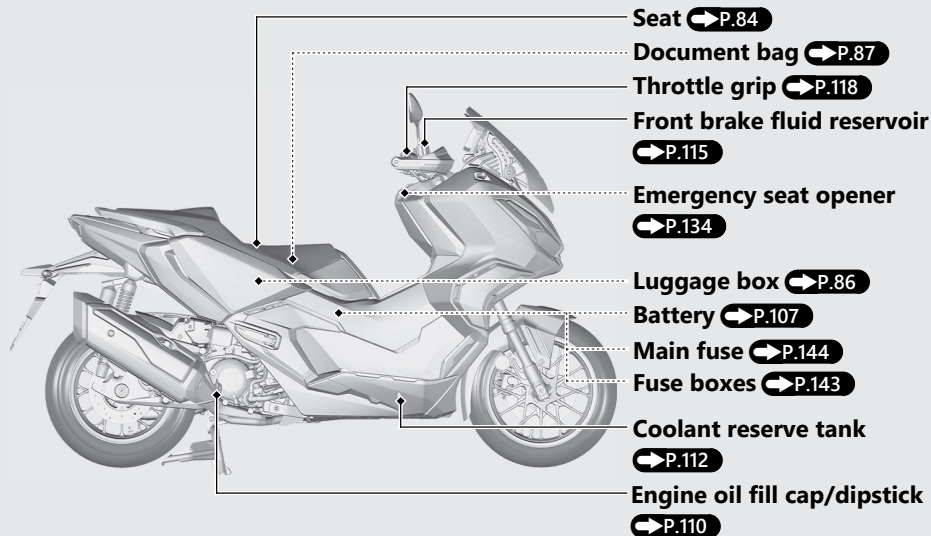

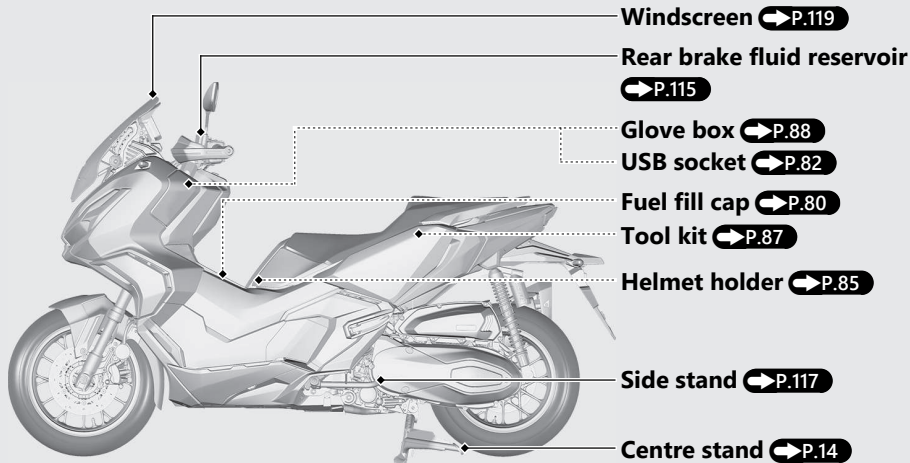

Instruments

Tachometer

NOTICE

Do not operate the engine in the tachometer red zone. Excessive engine speed can adversely affect engine life.

Tachometer red zone
(excessive engine rpm range)



Speedometer

Display Check

When the ignition switch is turned to the **I** (On) position, initial animation will show. If any part of these displays does not come on when it should, have your dealer check for problems.

Torque Control level indicator ➡ P.71

Clock
Clock setting:
➡ P.32

Status icon

III FO/III HK/III SI/III TH type

Displays the status of the Honda Smartphone Voice Control system.

➡ P.67



Battery voltage meter
➡ P.25 /

Air temperature meter
➡ P.25

Average fuel mileage
[AVG CONS. A/B] ➡ P.24 /
Elapsed time [ELAPSED A/B]
➡ P.26

Fuel gauge
➡ P.25

OIL CHANGE

Oil change indicator ➡ P.28 /
Maintenance indicator ➡ P.29


Odometer [TOTAL] ➡ P.24 /
Tripmeter [TRIP A/B] ➡ P.24 /
Available driving distance [RANGE] ➡ P.26

Instruments (Continued)

Switching the Display

Select the info area


Press the ▲ or ▼ of the ◀▶ sel switch to move the cursor to a desired info area.

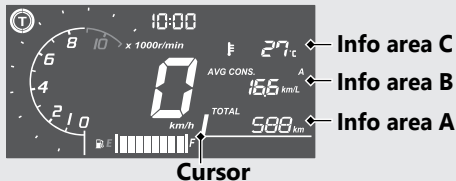

Info area C

Info area B

Info area A




➡ Press the ▲ of the ◀▶ sel switch

⇨ Press the ▼ of the ◀▶ sel switch

Select the item

Press the  sel switch to the  or  to a desired item.


Info area A

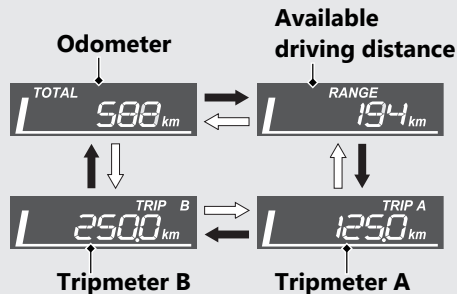


➡ Press  sel switch to the 

➡ Press  sel switch to the 

Info area B

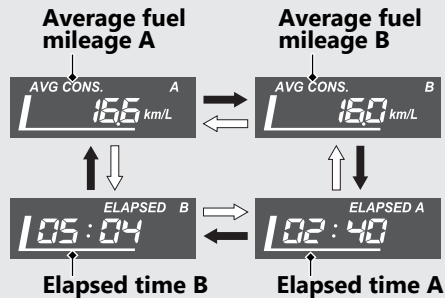

Info area C

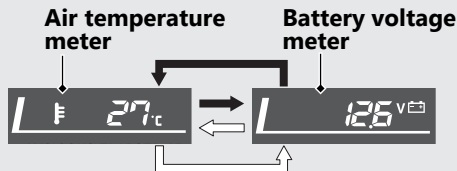

➡ Press  sel switch to the 

➡ Press  sel switch to the 

Instruments *(Continued)*

| Odometer

Total distance ridden.

When "-----" is displayed, go to your dealer for service.

| Tripmeter

Distance ridden since tripmeter A or tripmeter B respectively were reset.

When "----.-" is displayed, go to your dealer for service.

To reset the tripmeter: ➡ P.27

| Average fuel mileage A/B

Displays the average fuel mileage since the selected tripmeter was reset.

The average fuel mileage will be calculated based on value displayed on the tripmeter (A or B) selected.

Display range:

0.0 to 299.9 km/L (L/100 km)

- When the tripmeter A or B is reset: "---.-" is displayed.
- If the calculated value is 299.9 km/L (L/100 km) or more: "299.9" is displayed.

When "---.-" is displayed except for the above-mentioned cases, go to your dealer for service.

To reset the average fuel mileage:

➡ P.27

Fuel gauge

Remaining fuel when there is only 1st (E) segment: approximately 2.32 L (0.613 US gal, 0.510 Imp gal).
This segment flashes when the fuel decreases further.



KO type only

NOTICE

You should refuel when the reading approaches the 1st (E) segment. Running out of fuel can cause the engine to misfire, damaging the catalytic converter.

If the fuel gauge indicator flashes in a repeat pattern or turns off: ➡ P.131

Air temperature meter

Shows ambient temperature.

Display range: -10 to 50°C

- Below -10°C: "---" is displayed
- Above 50°C: 50°C flashes

❄ comes on when air temperature is below 3°C, and goes off when air temperature reaches 5°C after ❄ comes on.

The temperature readout may be incorrect at low speeds due to reflected heat.

Battery voltage meter

Displays the current voltage.

Instruments *(Continued)*

Available driving distance

Displays the estimated distance you can travel on the remaining fuel. The indicated available driving distance is calculated based on the driving conditions, and the indicated figure may not always be the actual available distance.

Display range:

999 to 5 km

- Initial display: "---" is displayed.
- If the calculated distance is 999 km or more: "999" is displayed.
- When the calculated distance is below 5 km or the amount of remaining fuel is below 1.0 L (0.26 US gal, 0.22 Imp gal):
"---" is displayed.

When "---" is displayed except for the above-mentioned cases, go to your dealer for service.

Elapsed time A/B

Displays the elapsed time during the engine running since the selected tripmeter was reset.

Display range: 00:00 to 199:59

(hours:minutes)

- The elapsed time return to 00:00 when the readout exceeds 199:59.

To reset the elapsed time: ➡ **P.27**

To reset the tripmeter A, average fuel mileage A and elapsed time A

- 1 Select the info area A. ➡ P.22
- 2 Select the tripmeter A. ➡ P.23
- 3 Press and hold the  sel switch to the .




- Even if average fuel mileage A or elapsed time A is not selected in the info area, average fuel mileage A and elapsed time A will be reset.

The display after resetting the tripmeter

Average fuel mileage A



Elapsed time A



To reset the tripmeter B, average fuel mileage B and elapsed time B

- 1 Select the info area A. ➡ P.22
- 2 Select the tripmeter B. ➡ P.23
- 3 Press and hold the  sel switch to the .




- Even if average fuel mileage B or elapsed time B is not selected in the info area, average fuel mileage B and elapsed time B will be reset.

The display after resetting the tripmeter

Average fuel mileage B



Elapsed time B



Instruments *(Continued)*

Oil change indicator

The indicator is turned on whenever the running distance reaches the programmed oil change interval.

When the oil change indicator is appeared, reset the indicator after changing the engine oil.

- ▶ The oil change indicator is appeared for the first time when the running distance reaches 1,000 km.
- ▶ The oil change indicator is appeared when the running distance reaches every 12,000 km after the first indication was reset.



Oil change indicator

If the oil is changed before the oil change indicator comes on, be sure to reset the oil change indicator after changing the oil.

To reset the oil change indicator

➡ P.30

You can also check the remaining distance to next interval of the oil change.

To check the remaining distance

➡ P.30

Maintenance indicator

The indicator is turned on whenever the running distance reaches the programmed maintenance interval.

When the maintenance indicator is appeared, reset the indicator after performing the periodic maintenance. ➡ P.90

- ▶ The maintenance indicator is appeared for the first time when the running distance reaches 1,000 km.

FO/III FO/KO/III SI type

- ▶ The maintenance indicator is appeared when the running distance reaches every 12,000 km after first indication was reset.

III HK/MA/TH/III TH type

- ▶ The maintenance indicator is appeared when the running distance reaches every 6,000 km after first indication was reset.
- ▶ The indicator does not go off until it is reset.



Maintenance indicator

If the periodic maintenance is performed before the maintenance indicator comes on, be sure to reset the maintenance indicator after performing the periodic maintenance.

To reset the maintenance indicator

➡ P.30

You can also check the remaining distance to next interval of the maintenance.

To check the remaining distance


➡ P.30

Instruments *(Continued)*

To check the remaining distance

You can check the remaining distance to next interval of the oil change and maintenance.

When the **[Fn]** function switch is pressed, each remaining distance appears briefly.

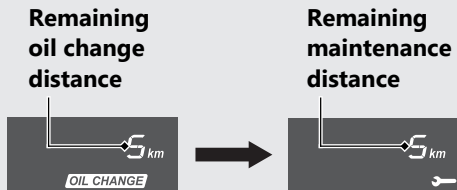

To reset the oil change indicator and maintenance indicator

- 1 Press and hold the **[Fn]** function switch while the ignition switch to the **I** (On) position and keep holding the **[Fn]** function switch until the oil change indicator and remaining distance start flashing.

► The button is not pressed for about 30 seconds, the control is automatically switched the ordinary display.



- 2 Press and hold the  sel switch to the . The oil change indicator and remaining distance are reset, then the maintenance indicator and remaining distance start flashing after next interval of the oil change is appeared briefly.

- If the oil change indicator and remaining distance are not to be reset, press the  of the  sel switch.



- 3 Press and hold the  sel switch to the . The maintenance indicator and remaining distance are reset, then the display will return to the ordinary display after next interval of the maintenance is appeared briefly.

- If the maintenance indicator and remaining distance are not to be reset, press the  of the  sel switch.

FO/III FO/KO/III SI type



III HK/MA/TH/III TH type



Instruments (Continued)

Display Setting

Following items to change sequentially.


- Time format setting
- Clock setting
- Backlight brightness adjustment
- Changing of fuel mileage meter unit
- **III FO/III HK/III SI/III TH type**
Bluetooth® pairing setting

If the ignition switch is turned to the  (Off) position or the button is not pressed for about 30 seconds, the control is automatically switched from the setting mode to the ordinary display.

If the button is not pressed for about 30 seconds items in the process of being set will be discarded and only items where settings have been finalized will be applied.

Only if the ignition switch is turned to the  (Off) position will items in the process of

being set and those that are finalized be applied.

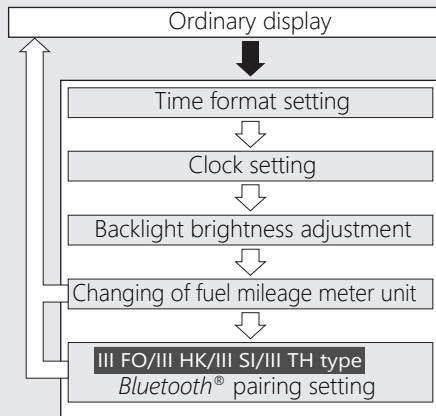


 Press and hold the **[Fn]** function switch

 Press the  sel switch to the 


1 Time format setting:

You can switch the time format between 12 hour format or 24 hour format.

- 1 Turn the ignition switch to **I** (On) position.
- 2 Press and hold the **[Fn]** function switch, the current time format start flashing.



- 3 Press the **[▲]** or **[▼]** of the **[↔]** sel switch to select "12 hr" or "24 hr".




- 4 Press the **[↔]** sel switch to the **[▶]**. The time format is set, and then the display moves to the clock setting.

2 Clock setting:


- 1 Press the **[▲]** or **[▼]** of the **[↔]** sel switch until the desired hour is displayed.
 ▶ Press and hold the **[▲]** of the **[↔]** sel switch to advance the hour fast.



- 2 Press the **[↔]** sel switch to the **[▶]**. The minute digits start flashing.



- 3 Press the **[▲]** or **[▼]** of the **[↔]** sel switch until the desired minute is displayed.
 ▶ Press and hold the **[▲]** of the **[↔]** sel switch to advance the minute fast.



Instruments *(Continued)*

- ④ Press the  sel switch to the .


The clock is set, and then the display moves to the backlight brightness adjustment.

3 Backlight brightness adjustment:

You can adjust the brightness to one of five levels.

- ① Press the  of the  sel switch.

The brightness is switched.




- ② Press the  sel switch to the .

The backlight is set, and then the display moves to the changing of the fuel mileage meter unit.

4 Changing of fuel mileage meter unit:

- 1 Press the  of the  sel switch to select "L/100km" or "km/L".



2 FO/KO/MA/TH type

Press the  sel switch to the .

The fuel mileage meter unit is set, and then the display will return to the ordinary display.

III FO/III HK/III SI/III TH type

Press the  sel switch to the .


The fuel mileage meter unit is set, and then the display moves to the *Bluetooth*® pairing setting.

5 *Bluetooth*® pairing setting

III FO/III HK/III SI/III TH type

You can reset the *Bluetooth*® pairing information.

- 1 Press the  of the  sel switch to select "YES" or "NO."
 - If you do not want to reset the *Bluetooth*® pairing information, select "NO."



Instruments (Continued)

- 2 Press the  sel switch to the . *Bluetooth*® pairing setting is set.

Select "NO"

Display will return to the ordinary display.

Select "YES"

After resetting, "SUCCESS" is displayed and the pairing mode is started.

- When the pairing mode is started, the display will return to the ordinary display and the *Bluetooth*® indicator blinking will start.



- If the pairing information remains in your smartphone even if the pairing information is deleted from the vehicle, the smartphone may be connected to the vehicle again.

If the system fails to reset the pairing record, "FAIL" will be displayed and the display will return to ordinary display.

Return to ① and follow the procedure again.



Indicators

If one of these indicators does not come on when it should, have your dealer check for problems.

 **High beam indicator**

 **Left turn signal indicator**

 **ABS (Anti-lock Brake System) indicator**

Comes on when the ignition switch is turned to the **I** (On) position. Goes off when your speed reaches approximately 10 km/h (6 mph).

If it comes on while riding: ➡ **P.128**

 **Low oil pressure indicator**

Comes on when the ignition switch is turned to the **I** (On) position. Goes off when the engine starts.


If it comes on while engine is running: ➡ **P.126**

 **Honda SMART Key Indicator**

Comes on when vehicle and Honda SMART Key verification is complete, and the ignition switch can be operated. Goes off when the ignition switch is turned to the **I** (On) position.

When the Honda SMART Key indicator flashes:

➡ **P.130**

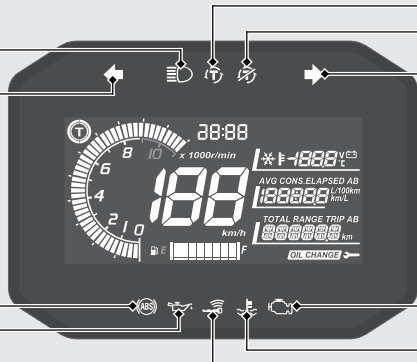

 Torque Control indicator

- Comes on when the ignition switch is turned to the **I** (On) position. Goes off when your speed reaches approximately 3 km/h (2 mph) to indicate Torque Control is ready to work.
- Blinks when Torque Control is operating.

If it comes on while riding: ➡ P.129

 Torque Control OFF indicator

Comes on when the Torque Control is turned to off.

 Right turn signal indicator **PGM-FI (Programmed Fuel Injection) malfunction indicator lamp (MIL)**

Comes on briefly when the ignition switch is turned to the **I** (On) position, regardless of engine stop switch position.


If it comes on while engine is running: ➡ P.127

 High coolant temperature indicator

Comes on briefly when the ignition switch is turned to the **I** (On) position.

If it comes on while riding: ➡ P.125

Switches

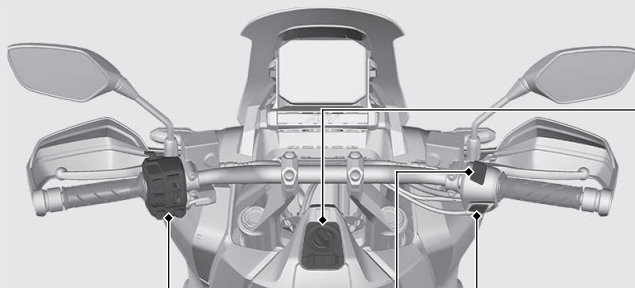

Left handlebar switch

➡ P.42

 **Start button**

Engine stop switch

Should normally remain in the  (Run) position.


- ▶ In an emergency, switch to the  (Stop) position (the starter motor will not operate) to stop the engine.

Ignition switch

Switches the electrical system on/off, locks the steering, and operates the fuel lid and seat opener switch.


To unlock the ignition switch:


 **P.50**

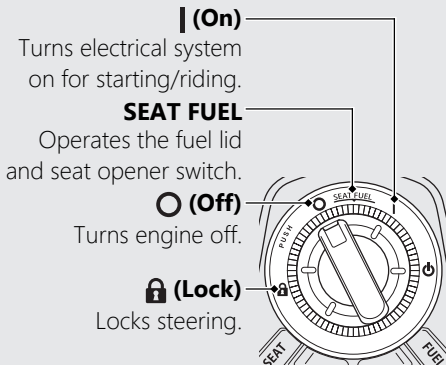

Switches (Continued)

Left handlebar switches

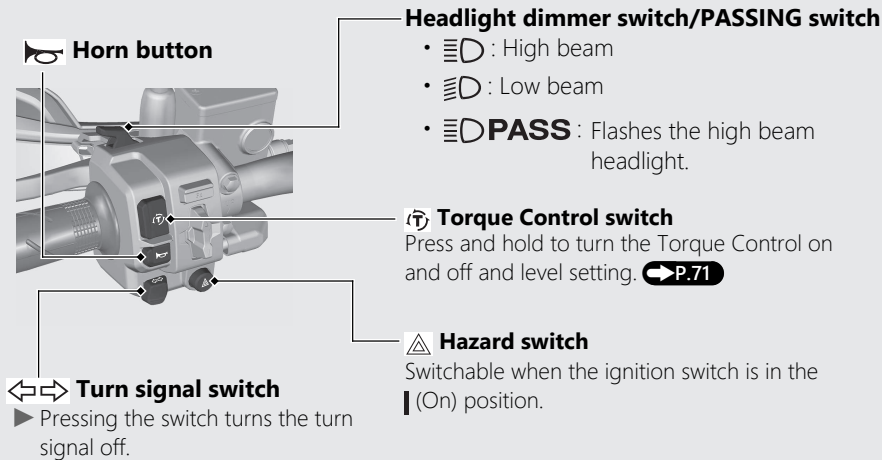

**Fn Function switch**

Used to operate and set the display.

➡P.22 ➡P.32

Sel switch

Used to operate and set the display.

➡P.22 ➡P.32

III FO/III HK/III SI/III TH type


Also used to operate the Honda Smartphone Voice Control system. ➡P.67

Switches *(Continued)*

Steering Lock

Lock the steering when parking to help prevent theft.

A U-shaped wheel lock or similar device is also recommended.

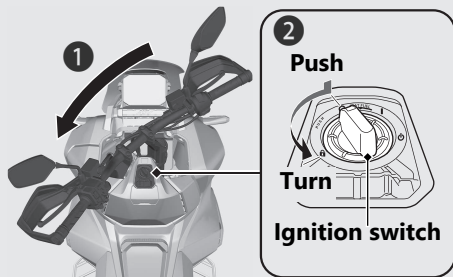

Locking

- 1 Turn the handlebar all the way to the left.
- 2 Push the ignition switch down, and turn it to the  (Lock) position.
 - ▶ To unlock the ignition switch ➡ **P.50**
 - ▶ Jiggle the handlebar if the lock is difficult to engage.
- 3 Lock the ignition switch. ➡ **P.51**

Unlocking

Push the ignition switch down, and turn it to the  (Off) position.

- ▶ To unlock the ignition switch ➡ **P.50**

Honda SMART Key System

The Honda SMART Key system allows you to operate the main switch without inserting a key into a keyhole.

The system runs a two-way authentication between the vehicle and the Honda SMART Key to verify if it is the registered Honda SMART Key.

The Honda SMART Key system uses low-intensity radio waves. It may affect medical equipment such as a cardiac pacemaker.

Honda SMART Key System *(Continued)*

Switching the Honda SMART Key System

To switch the Honda SMART Key system to activation or deactivation


Press the ON/OFF button until the Honda SMART Key LED changes colour.

To check the Honda SMART Key system status

Lightly press the ON/OFF button. The Honda SMART Key LED will show the status.

When the Honda SMART Key LED is:

- Green: Honda SMART Key system (active) authentication can be performed.
- Red: Honda SMART Key system (Inactive) authentication cannot be performed.



Operating Range


The operating range varies when the ignition switch is locked or unlocked.

The Honda SMART Key system uses low-intensity radio waves. Therefore, the operating range may be wider or narrower, or the Honda SMART Key system may not work properly in the following situations:

- When the Honda SMART Key battery is depleted.
- When there are facilities nearby that generate strong radio waves or noise, such as TV towers, power stations, radio stations, or airports.
- When you carry the Honda SMART Key with a laptop or wireless communication device such as a radio or mobile phone.
- When the Honda SMART Key comes into contact with or is covered by metal objects.

When the ignition switch is unlocked:


The system can be operated within the shaded area shown in the illustration.

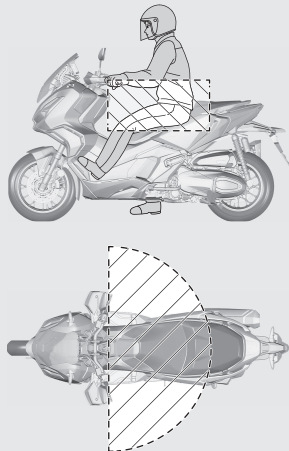

Honda SMART Key System *(Continued)*


When the ignition switch is locked:

The system can be operated within the shaded area shown in the illustration.



Anyone can unlock the ignition switch and start the engine if your Honda SMART Key is within operating range of your vehicle, even if you are on the other side of a wall or window. If you are away from your vehicle but your Honda SMART Key is still within operating range, deactivate the Honda SMART Key system.

To switching the Honda SMART Key system ➡ **P.46**



Anyone in possession of the Honda SMART Key can perform the following operations if the Honda SMART Key is within operating range:

- Starting the engine
- Unlocking the ignition switch
- Releasing the seat lock
- Opening the fuel lid
- Unlocking the steering lock

You should always keep the Honda SMART Key on your person after you get on and off the vehicle or while riding.

Do not place the Honda SMART Key in any compartment.

If the ignition switch is in the **I** (On) position, the vehicle can be operated even by a person who does not have a verified Honda SMART Key.

Whenever you leave your vehicle, lock the steering and lock the ignition switch.



Make sure the ignition switch ring goes off and all turn signals flash once at this time.

Honda SMART Key System *(Continued)*

Switching the ignition switch

To Unlock the Ignition Switch

- 1 Make sure that the Honda SMART Key is activated. ➡ **P.46**
- 2 To authenticate the Honda SMART Key system, push the ignition switch.
 - ▶ When properly authenticated and the ignition switch is unlocked, the Honda SMART Key indicator and ignition switch ring come on.

Except FO/III FO type

The buzzer also rings 2 times at this time.
The buzzer sound can be cancelled.

➡ P.53
- 3 Turn the ignition switch to the **I** (On) position while the Honda SMART Key indicator comes on.

- ▶ If you do not turn the ignition switch to the **I** (On) position within 20 seconds after pushing in the ignition switch in, the Honda SMART Key indicator and ignition switch ring will go off, the turn signals flash 1 time, and then the ignition switch will be locked.


Except FO/III FO type

The buzzer also rings 1 time before the ignition switch will be locked.
The buzzer sound can be cancelled.

➡ P.53

When the Honda SMART Key system does not work properly ➡ P.132

If someone without the Honda SMART Key tries to turn the ignition switch, the ignition switch rotates freely. If you notice the ignition switch is in a different position, turn the ignition switch to the original (○ (Off) or  (Lock)) position.

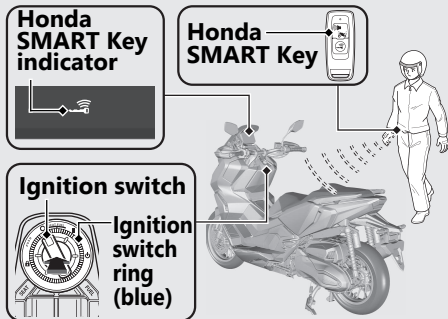

To Lock the Ignition Switch

- 1 Turn the ignition switch to the SEAT FUEL, ○ (Off) or  (Lock) position.
- 2 Lock the ignition switch by doing one of the following:
 - Leave the operating range with the Honda SMART Key. ➡ P.47
 - Push the ignition switch.
 - Wait for approximately 20 seconds after turning the ignition switch from  (On) to SEAT FUEL, ○ (Off) or  (Lock).
 - Switch the Honda SMART Key system to inactive. ➡ P.46

Honda SMART Key System (Continued)

- ③ Make sure that the Honda SMART Key indicator and ignition switch ring go off and the turn signals flash once. This indicates that the ignition switch is locked.



Except FO/III FO type

The buzzer also rings 1 time.

The buzzer sound can be cancelled.

➡P.53

When the Honda SMART Key system does not work properly ➡P.132

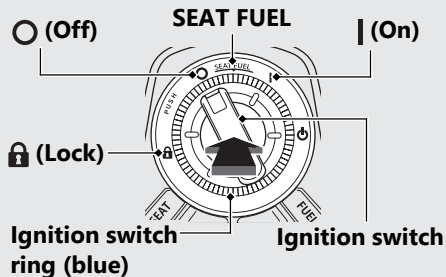

Always make sure the ignition switch position is in the  (Off) or  (Lock) position when you leave your vehicle.

When the ignition switch is locked in the SEAT FUEL position, the ignition switch can be turned  (Off) only once.

When the ignition switch is locked in the  (Off) position, the steering cannot be locked.

To lock the steering, unlock the ignition switch. ➡ P.50

Switch the Buzzer Sound When the Ignition Switch is Locked/Unlocked

Except FO/III FO type

Enable

- 1 Deactivate the Honda SMART Key system.
➡ P.46
- 2 Lightly press the ON/OFF button. The red Honda SMART Key LED comes on.
- 3 While the red LED is on, press the answer back/alarm button.
 - ▶ The red LED starts blinking when the buzzer sound is properly enabled.

Disable

- 1 Deactivate the Honda SMART Key system.
➡ P.46
- 2 Lightly press the ON/OFF button. The red Honda SMART Key LED blinks.
- 3 While the red LED is blinking, press the answer back/alarm button.
 - ▶ The red LED stops blinking but stays on when the buzzer sound is properly disabled.


Anti-theft Alarm System

Except FO/III FO type

The anti-theft alarm system is a device to reduce the likelihood of theft. When the sensor detects vibration or movement with the ignition switch in the  (Off) or  (Lock) position and the system is set, the alarm is activated.

The buzzer rings and the turn signals blink for about 10 seconds when the anti-theft alarm system detects vibration caused by contact or movement.

The buzzer rings and the turn signals blink for about 60 seconds when the anti-theft alarm system detects a substantial change in the vehicle posture. After the buzzer rings for 60 seconds, the anti-theft alarm system will be reset in that posture.

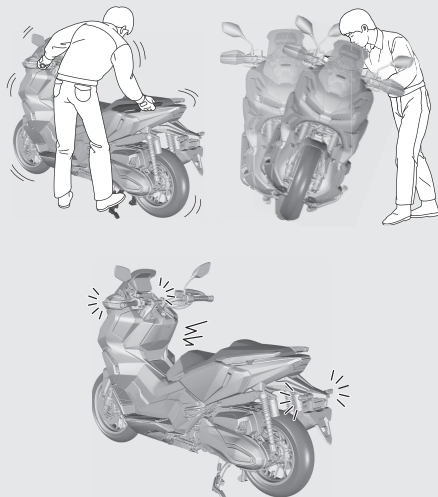

If the ignition switch is left the  (Off) or  (Lock) position for more than 10 days, the anti-theft alarm system will no longer operate.

When the system is active and the vehicle receives a signal from pressing the answer back/alarm button, system activation will be extended for 10 days.

To reset the system, turn the ignition switch to the  (On) position once.

The anti-theft alarm system uses low-intensity radio waves. It may affect medical equipment such as a cardiac pacemaker. When the battery in the vehicle is weak, the anti-theft alarm system may not function.

Setting the Anti-theft Alarm System

- 1 Turn the ignition switch to  (Off) or  (Lock) position.
- 2 Press the answer back/alarm button. Within a second, the turn signal blinks and the buzzer rings 1 time. After 2.5 seconds, the buzzer rings 1 time. The anti-theft alarm system is activated.

The alarm indicator flashes while the anti-theft alarm system is activated.

Answer back/ alarm button



Alarm indicator (red)



Anti-theft Alarm System *(Continued)*

Cancelling the Anti-theft Alarm System

To cancel the anti-theft alarm system, unlock the ignition switch. ➡ **P.50**

When the ignition switch is unlocked, the buzzer rings 2 times and the alarm indicator goes off.

- ▶ The buzzer sound can be cancelled.

➡ **P.53**

Stopping the Anti-theft Alarm Activation

To stop the anti-theft alarm activation, do one of the following:

- Press the answer back/alarm button on the Honda SMART Key.
 - ▶ After stopping the anti-theft alarm activation, the anti-theft alarm system will be reset.
- Unlock the ignition switch. ➡ **P.50**
 - ▶ After stopping the anti-theft alarm activation, the anti-theft alarm system will be cancelled.

**Answer back/
alarm button**



Adjusting the Sensitivity of Anti-theft Alarm System

You can select from 3 sensitivity levels for the anti-theft alarm system.

- 1 Make sure that the Honda SMART Key system is active. ➡ **P.46**
- 2 Push the ignition switch to authenticate the Honda SMART Key system. ➡ **P.50**
- 3 Press and hold the ignition switch for more than 4 seconds.
 - ▶ The Honda SMART Key indicator and ignition switch ring flash.

**Answer back/
alarm button**



Ignition switch



**Ignition switch ring
(blue)**

- 4 Push the ignition switch 1 time while the Honda SMART Key indicator and ignition switch ring are flashing.
 - ▶ The Honda SMART Key indicator and ignition switch ring come on, and a buzzer sounds.
- 5 Repeat the following 3 times:
 - ▶ Press the answer back/alarm button on the Honda SMART Key 4 times and the ignition switch 1 time.
 - ▶ When the ignition switch is pressed, the Honda SMART Key indicator and ignition switch ring go off, and the buzzer sounds. When they light again, do the next input.
 - ▶ When the answer back/alarm button is pressed, the Honda SMART Key LED comes on. Make sure the LED goes off before pressing the button again.

Anti-theft Alarm System *(Continued)*

- ▶ When the answer back/alarm button or ignition switch is not pressed for 1 minute, the Honda SMART Key indicator and ignition switch ring flash 3 times, and then the buzzer sounds and the mode is cancelled. Return to ❶ and do the procedure again.
 - ▶ If you press the answer back/alarm button the wrong number of times before you repeat the procedure 3 times, then repeat the procedure 3 times again.
- ❻ Press the answer back/alarm button to select from 3 sensitivity levels.
 - 3 alarm rings: high sensitivity
 - 2 alarm rings: medium sensitivity
 - 1 alarm ring: low sensitivityThe Honda SMART Key indicator and ignition switch ring come on while setting.
 - ❼ Press and hold the ignition switch for more than 2 seconds. The sensitivity level is set.
 - ▶ The Honda SMART Key indicator and ignition switch ring turn off, and a buzzer sounds once.
 - ▶ When the answer back/alarm button is not pressed for 10 seconds, the Honda SMART Key indicator and ignition switch ring flash 3 times, and then the buzzer sounds, and the sensitivity level is set.

If the Anti-Theft Alarm System Does Not Operate Properly

If any of the following situations arise, battery (➡P.107) in the vehicle is discharged or there is a system problem. Remove the battery and see your dealer.

The alarm does not ring.

The alarm rings but fades out.

The alarm system does not stop.

Answer Back System

The answer back system is a device to find the location of your vehicle and to inform you that the immobilizer function of the Honda SMART key system is activated.

Except FO/III FO type

When you press the answer back/alarm button on the Honda SMART key with the ignition switch is in the  (Off) or  (Lock) position and the anti-theft alarm system is set, the turn signals light, the ignition switch ring lights, and the buzzer rings, informing you of your vehicle's location and activation of the immobilizer function.


The ignition switch ring will light for about 1 minute.

FO/III FO type

When you press the answer back button on the Honda SMART key with the ignition switch is in the  (Off) or  (Lock) position, the turn signals light, and the ignition switch ring lights, informing you of your vehicle's location and activation of the immobilizer function.

The ignition switch ring will light for about 1 minute.

The answer back system uses low-intensity radio waves. It may affect medical equipment such as a cardiac pacemaker.

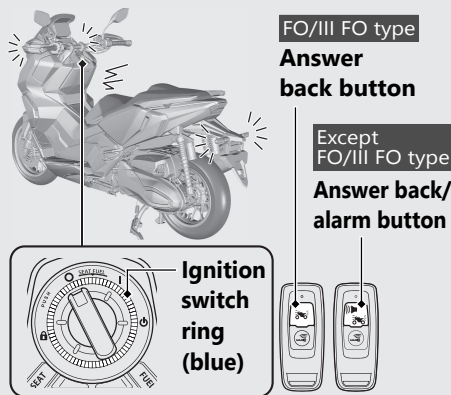

Operation

Press the answer back/alarm button (FO/III FO type answer back button) on the Honda SMART Key.

- ▶ The answer back system will not function when the ignition switch is in the  (On) position.

If the ignition switch is left the  (Off) or  (Lock) position for more than 10 days, the answer back system will no longer operate. When the system is active and the vehicle receives a signal from pressing the answer back/alarm button (FO/III FO type answer back button), system activation will be extended for 10 days.

To reset the system, unlock the ignition switch and turn the ignition switch  (On) position once.

- ▶ To unlock the ignition switch  **P.50**

When the battery in the vehicle is weak, the answer back system may not function.

Answer Back System *(Continued)*

Adjusting the Answer Back Buzzer Sound Volume Level

Except FO/III FO type


You can select 3 buzzer sound volume levels.

- ① Make sure that the Honda SMART Key system is active. ➡ **P.46**
- ② Push the ignition switch to authenticate the Honda SMART Key system. ➡ **P.50**
- ③ Press and hold the ignition switch for more than 4 seconds.
 - ▶ The Honda SMART Key indicator and ignition switch ring flash.

**Answer back/
alarm button**



Ignition switch



**Ignition switch ring
(blue)**

- ④ Push the ignition switch 1 time while the Honda SMART Key indicator and ignition switch ring are flashing.
 - ▶ The Honda SMART Key indicator and ignition switch ring come on, and a buzzer sounds.
- ⑤ Repeat the following 3 times:
 - ▶ Press the answer back/alarm button on the Honda SMART Key 2 times and the ignition switch 1 time.
 - ▶ When the ignition switch is pressed, the Honda SMART Key indicator and ignition switch ring go off, and the buzzer sounds. When they light again, do the next input.
 - ▶ When the answer back/alarm button is pressed, the Honda SMART Key LED comes on. Make sure the LED goes off before pressing the button again.

- ▶ When the answer back/alarm button or ignition switch is not pressed for 1 minute, the Honda SMART Key indicator and ignition switch ring flash 3 times, and then the buzzer sounds and the mode is cancelled. Return to ❶ and do the procedure again.
 - ▶ If you press the answer back/alarm button the wrong number of times before you repeat the procedure 3 times, then repeat the procedure 3 times again.
- ❻ Press the answer back/alarm button to select from 3 levels for the sound volume. The Honda SMART Key indicator and ignition switch ring come on while setting.
- ❼ Press and hold the ignition switch for more than 2 seconds. The sound volume level is set.
- ▶ The Honda SMART Key indicator and ignition switch ring turn off, and a buzzer sounds once.
 - ▶ When the answer back/alarm button is not pressed for 10 seconds, the Honda SMART Key indicator and ignition switch ring flash 3 times, and then the buzzer sounds, and the sound volume level is set.

Answer Back System *(Continued)*

Changing the Answer Back Buzzer Sound Pattern

Except FO/III FO type

You can select 3 buzzer sound patterns.

- ① Make sure that the Honda SMART Key system is active. ➡ **P.46**
- ② Push the ignition switch to authenticate the Honda SMART Key system. ➡ **P.50**
- ③ Press and hold the ignition switch for more than 4 seconds.
 - ▶ The Honda SMART Key indicator and ignition switch ring flash.

**Answer back/
alarm button**



Ignition switch



**Ignition switch ring
(blue)**

- ④ Push the ignition switch 1 time while the Honda SMART Key indicator and ignition switch ring are flashing.
 - ▶ The Honda SMART Key indicator and ignition switch ring come on, and a buzzer sounds.
- ⑤ Repeat the following 3 times:
 - Press the answer back/alarm button on the Honda SMART Key 3 times and the ignition switch 1 time.
 - ▶ When the ignition switch is pressed, the Honda SMART Key indicator and ignition switch ring go off, and the buzzer sounds. When they light again, do the next input.
 - ▶ When the answer back/alarm button is pressed, the Honda SMART Key LED comes on. Make sure the LED goes off before pressing the button again.

- ▶ When the answer back/alarm button or ignition switch is not pressed for 1 minute, the Honda SMART Key indicator and ignition switch ring flash 3 times, and then the buzzer sounds and the mode is cancelled. Return to ❶ and do the procedure again.
 - ▶ If you press the answer back/alarm button the wrong number of times before you repeat the procedure 3 times, then repeat the procedure 3 times again.
- ❻ Press the answer back/alarm button to select from 3 buzzer sound patterns. The Honda SMART Key indicator and ignition switch ring come on while setting.
- ❼ Press and hold the ignition switch for more than 2 seconds. The sound pattern is set.
- ▶ The Honda SMART Key indicator and ignition switch ring turn off, and a buzzer sounds once.
 - ▶ When the answer back/alarm button is not pressed for 10 seconds, the Honda SMART Key indicator and ignition switch ring flash 3 times, and then the buzzer sounds, and the sound pattern is set.

Answer Back System *(Continued)*

Temporary Silence Mode

Except FO/III FO type

Temporary silence mode is the immediate way to turn off the answer back system buzzer sound.

Enable:

Press and hold the answer back/alarm button for about 2 seconds, the Honda SMART Key LED changes to red.

Disable:

Re-press and hold the answer back/alarm button for about 2 seconds, the Honda SMART Key LED changes to green.

Honda Smartphone Voice Control system

III FO/III HK/III SI/III TH type

Connecting your smartphone with the vehicle and a *Bluetooth*® headset via *Bluetooth*® allows you to operate the smartphone by voice input from the headset. You can also use the system by operating switches on the handlebar.

- To use the system, you need to install the dedicated application on your smartphone beforehand and pair your smartphone with the vehicle and the headset.

For terms of service and information on how to install/operate the dedicated application, see the following URL:

<https://global.honda/voice-control-system/>



- The dedicated application is not available in some regions/countries.
For available countries, see the above URL.

Communication range:

Within 1 meters radius from vehicle

Supported *Bluetooth*® version/profiles

<i>Bluetooth</i> ® version	Bluetooth 4.2 or higher
<i>Bluetooth</i> ® profiles	GATT (Generic Attribute Profile)
	HOGP (HID over GATT Profile)

Bluetooth® Wireless Technology

The *Bluetooth*® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc., and any use of such marks by Honda Motors Co., Ltd., is under license. Other trademarks and trade names are those of their respective owners.

Honda Smartphone Voice Control system *(Continued)*

- Costs of network communication and communication equipment necessary for the use of this feature shall be borne by the user.
- You cannot pair two or more smartphones at once.
- Some smartphones may not be compatible with the feature.
- We shall not be liable for any damages or trouble in the use of smartphone.
- When unable to connect your smartphone to the vehicle, change the storage location of the smartphone.

The system itself has certain limitations. Therefore, you must verify the voice guidance and information in the meter provided by the system by carefully observing the roadway, signs, and signals, etc. If you are unsure, proceed with caution. Always use your own good judgement, and obey traffic laws while riding.

WARNING

Using the Honda Smartphone Voice Control system while riding can take your attention away from the road, causing a crash in which you could be seriously injured or killed.

- Be especially cautious when crossing intersections, in heavy traffic, etc.
- Observe the roadway, signs, and signals, carefully.
- Obey traffic laws while riding.


Honda Smartphone Voice Control system Limitations

Changes in operating systems, hardware, software, and other technology integral to providing Honda Smartphone Voice Control system functionality, as well as new or revised governmental regulations, may result in a decrease or cessation of Honda Smartphone Voice Control system functionality and services.

Honda cannot and does not provide any warranty or guarantee of future Honda Smartphone Voice Control system performance or functionality.

Pairing your smartphone via *Bluetooth*[®]

- 1 Reset the pairing information. ➡ P.32
- ➡ P.35
- 2 After resetting, complete pairing while the *Bluetooth*[®] indicator flashing by operated the application on your smartphone.



- ▶ For operation of the application, follow the instruction of the application.
- ▶ Make a *Bluetooth*[®] pairing after stopping at a safe place.

Honda Smartphone Voice Control system *(Continued)*

Changing the mode with the sel switch

The  sel switch can switch between the smartphone mode and meter operation mode.

The smartphone mode allows you to operate the Honda Smartphone Voice Control system with the  sel switch.

► The status icon area will be surrounded by a frame in the smartphone mode.

The meter operation mode allows you to perform operations other than the Honda Smartphone Voice Control system such as resetting the tripmeter or switching the display.


To switch to the smartphone mode:

After smartphone pairing is complete, press and hold the  sel switch to the  until the frame on the status icon area is displayed.

To switch to the meter operation mode:

If smartphone pairing is cancelled, it will automatically switch to the meter operation mode.

If you want to switch the mode to the meter operation mode while paired a smartphone, press and hold the  sel switch to the  until the frame on the status icon area disappears.

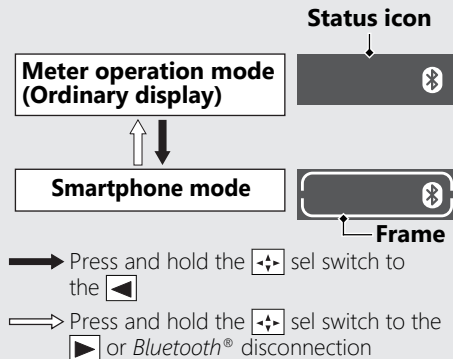

Honda Selectable Torque Control

Torque Control level (engine power control) can be selected or turned on/off.

- ▶ Do not operate the Torque Control switch while riding.
Stop the vehicle first, turn the Torque Control off or on and select the desired level.
- ▶ The Torque Control setting cannot be changed or turned off when the system is activated (Torque Control indicator flashing).
- ▶ In the following cases, the Torque Control will be turned on and the specific Torque Control level will automatically be set as below.
 - Each time the ignition switch is turned to the **I** (On) position or the Torque Control is turned on: Level 2

Torque Control level setting


The level can be selected by pressing the Torque Control switch.

- ▶ Level 2: the maximum Torque Control level
- ▶ Level 1: the minimum Torque Control level


Torque Control on and off

Torque Control can be turned on and off by pressing and holding the Torque Control switch.

Torque Control switch



Honda Selectable Torque Control *(Continued)*

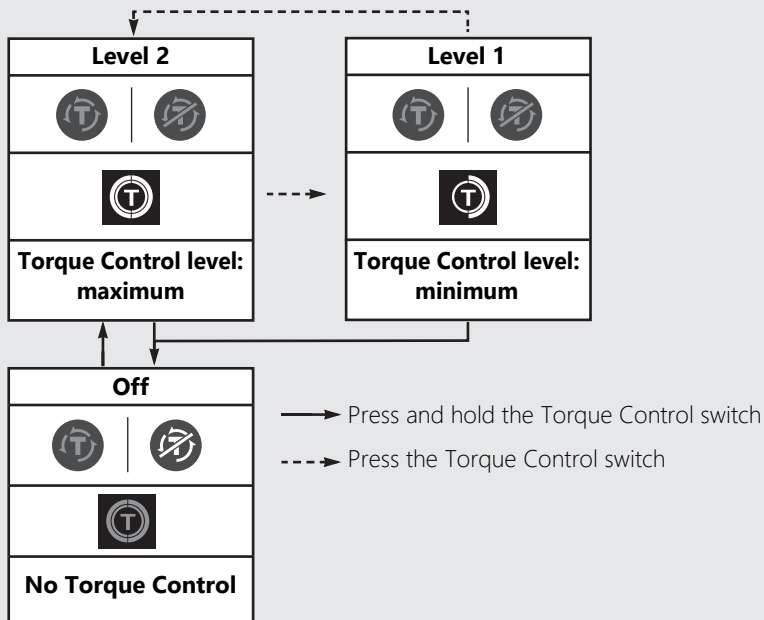

Starting the Engine

Start your engine using the following procedure, regardless of whether the engine is cold or warm.

This vehicle is equipped with a side stand ignition cut-off system.

- ▶ If the side stand is down, the engine cannot be started.
- ▶ If you lower the side stand with the engine running, it will automatically shut off.

This vehicle is equipped with a Honda SMART Key system. Always keep Honda SMART Key on you when you ride the vehicle. ➡ **P.47**


If the engine of this vehicle is stopped while the ignition switch is in the **I** (On) position, authentication will be disabled after a certain amount of time or if you leave the authentication range. Restart the engine by performing step **4** & **5** under the starting procedure.

NOTICE


- If the engine does not start within 5 seconds, turn the ignition switch to the **O** (Off) position and wait 10 seconds before trying to start the engine again to recover battery voltage.
- Extended fast idling and revving the engine can damage the engine and the exhaust system.
- Snapping the throttle or fast idling for more than about 5 minutes may cause exhaust pipe discolouration.

Starting the Engine (Continued)


- 1 Place the vehicle on its centre stand.
- 2 Make sure the engine stop switch is in the  (Run) position.
- 3 Turn the ignition switch to the  (On) position.
 - ▶ To unlock the ignition switch. ➔ P.50

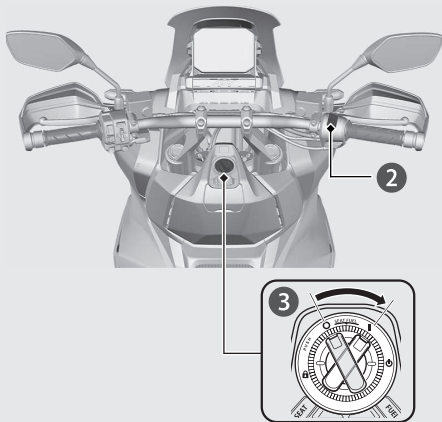

- 4 Squeeze the rear brake lever.
 - ▶ The starter motor will only work when the rear brake lever is squeezed and the side stand is up.




- 5 Press the start button with the throttle completely closed. Release the start button as soon as the engine starts.



If you cannot start the engine:

With the throttle slightly open (about 3 mm, without freeplay), press the start button.

About 3 mm, without freeplay**If the engine does not start:**

- ① Open the throttle fully and press the start button for 5 seconds.
- ② Repeat the normal starting procedure.
- ③ If the engine starts, open the throttle slightly if idling is unstable.
- ④ If the engine does not start, wait 10 seconds before trying steps ① & ② again.

If Engine Will Not Start ➡ P.124

Riding

Starting the Vehicle


- 1 Push the vehicle forward off the centre stand.

- ▶ Squeeze the rear brake lever.
- ▶ Keep throttle closed.

Make sure the side stand and centre stand are up.


- 2 Get on the vehicle.
 - ▶ Mount the vehicle from the left side, keeping at least one foot on the ground.
- 3 Release the brake lever.

- 4 Acceleration and deceleration
To accelerate: Open the throttle slowly.
To decelerate: Close the throttle.

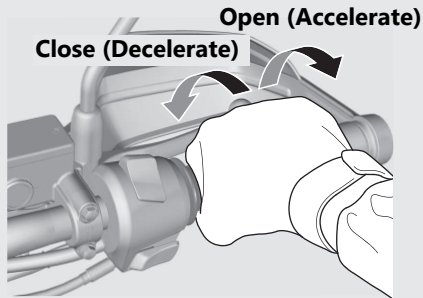

Braking

Close the throttle and apply the front and rear brake levers together.

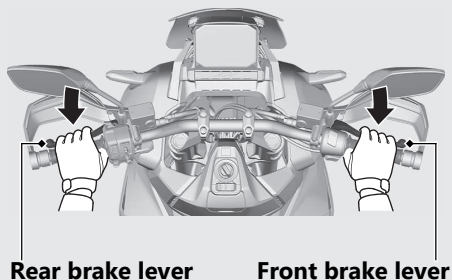


Emergency Stop Signal

Emergency stop signal activates when the system detects hard braking about 50 km/h (30 mph) or above to alert drivers behind you about sudden braking by rapidly flashing both turn signal lights. This may help to alert drivers behind you to take appropriate means to avoid a possible collision with your vehicle.

The emergency stop signal stops operating when:

- You release the brakes.
- The ABS is deactivated.
- Your vehicle's decelerating speed becomes moderate.
- You press the hazard switch.

When the system activates:

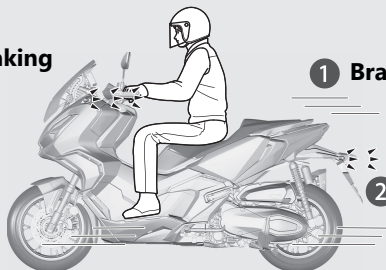**1****Hard braking****1****Brakelight comes on****2****Both turn signals flash****2****Both turn signal indicators blink**

- ▶ The emergency stop signal is not a system that can prevent a possible rear-end collision caused by your hard braking. It is always recommended to avoid hard braking unless it is absolutely necessary.
- ▶ The emergency stop signal does not activate with the hazard switch pressed in.
- ▶ If the ABS stops working for a certain period during braking, the emergency stop signal may not activate at all.

Refuelling

Fuel type: Unleaded petrol only



Fuel octane number: Your vehicle is designed to use Research Octane Number (RON) 91 or higher.

Tank capacity: 11.7 L (3.09 US gal, 2.57 Imp gal)


Refuelling and Fuel Guidelines ➡ P.14

Opening the Fuel Fill Cap

- 1 Turn the ignition switch to the SEAT FUEL position.
 - ▶ To unlock the ignition switch ➡ P.50
- 2 Push the FUEL side of the fuel lid and seat opener switch.
 - ▶ The fuel lid opens.

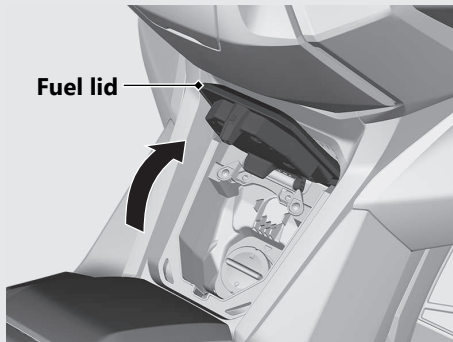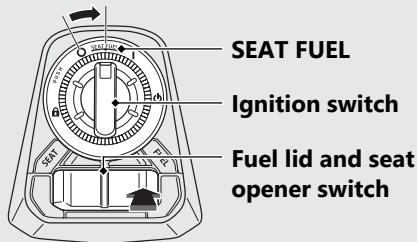

- ③ Turn the fuel fill cap counterclockwise and remove the fuel fill cap.

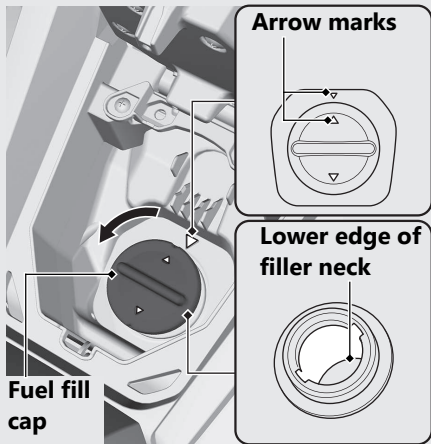

Do not fill with fuel above the lower edge of the filler neck.

Closing the Fuel Fill Cap

- ① Install and tighten the fuel fill cap firmly by turning it clockwise.
- ▶ Make sure that the arrow marks on the fuel fill cap and fuel tank are aligned.
- ② Close the fuel lid until it locks.
- ▶ Make sure that the fuel lid is closed securely.

⚠ WARNING

Petrol is highly flammable and explosive. You can be burned or seriously injured when handling fuel.

- Stop the engine, and keep heat, sparks, and flames away.
- Only handle fuel outdoors.
- Wipe up spills immediately.

USB Socket

Your vehicle is equipped with the USB socket (for USB Type-C only). The USB socket is located in the glove box.

Use USB devices at your own risk. In no event shall Honda be liable for any damage to your USB device when in use.

Only USB devices within the following specifications can be connected.


USB Type-C rated capacity is

15 W (5 V, 3.0 A).

► The USB socket is for charging only. Do not connect USB devices that exceed the rated capacity. They may not be charged properly even if connected. For information on usage or malfunction of the USB device you connect, refer to its instruction manual.

To connect your USB device

- 1 Open the glove box lid. ➡ **P.88**
- 2 Open the cover to access the USB socket.

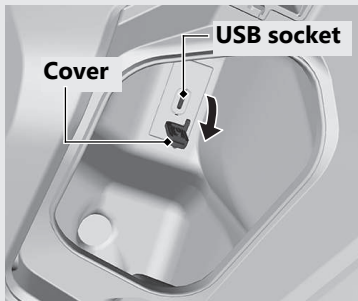


- 3 Connect a certified USB cable to the USB socket.

- ▶ To prevent the battery from becoming weak (or dead), keep the engine running while drawing current from the USB socket.
- ▶ To prevent entry of foreign matter into the USB socket, be sure to close the cover when the USB socket is not used.
- ▶ Carefully secure all connected devices, as vibration may cause damage to them or they could shift unexpectedly.

NOTICE

- Using any heat-generating USB devices or improperly rated USB devices can damage the USB socket.
- Do not use the USB socket in wet conditions, when or while washing or any other wet conditions as these will damage the USB socket.
- Do not allow the USB's harness to become pinched or trapped.

Storage Equipment

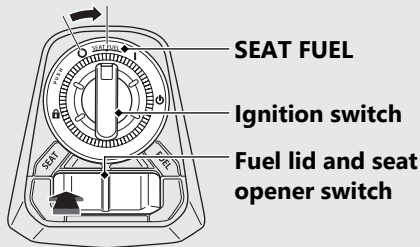


Seat Open

- ① Turn the handlebar pointed straight ahead.
- ② Turn the ignition switch to the SEAT FUEL position.
▶ To unlock the ignition switch ➡ **P.50**
- ③ Push the SEAT side of the fuel lid and seat opener switch.
- ④ Open the seat.


Seat Close

Close and push down on the rear of the seat until it locks. Make sure that the seat is locked securely by pulling it up lightly. Take care not to lock your key in the compartment under the seat.

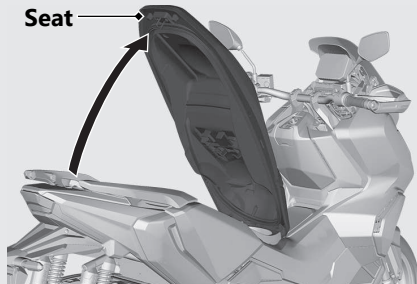

Helmet Holder

The helmet holder is located under the seat.
A helmet set wire is in the tool kit.

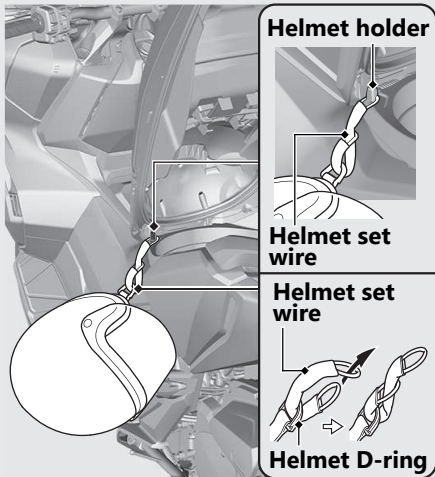

► Use the helmet holder only when parked.

Opening the seat ➡ P.84

⚠ WARNING


Riding with a helmet attached to the holder can interfere with your ability to safely operate the vehicle and could lead to a crash in which you can be seriously hurt or killed.

Use the helmet holder only while parked. Do not ride with a helmet secured by the holder.

Storage Equipment *(Continued)*

Luggage Box

The position of the partition board can be changed according to the cargo in stored.

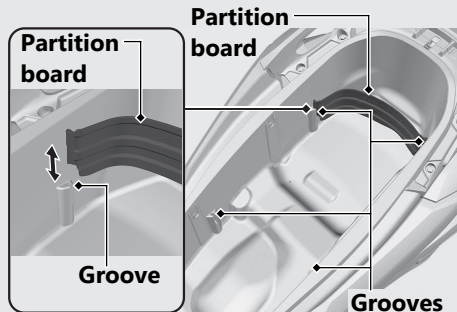

Never exceed the maximum weight limit.


Maximum Weight: 10 kg (22 lb)

- ▶ Do not store any items that are flammable or susceptible to heat damage.
- ▶ Do not store valuables or fragile articles.

Opening the seat ➡ P.84

Depending on the position of the partition board, one or two helmets can be stored. Position of the partition board can be changed into four places as shown.

- ▶ Make sure the direction of the helmet is facing forward.
- ▶ Some helmets may not fit in the compartment due to their size or design.
- ▶ Install the partition board securely in the grooves on the luggage box.

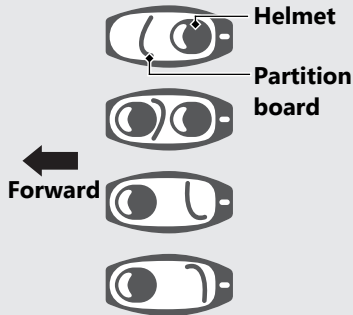


Tool Kit/Document Bag

The tool kit is located in the left side of the luggage box.

The document bag is located in the reverse side of the seat.


Document bag

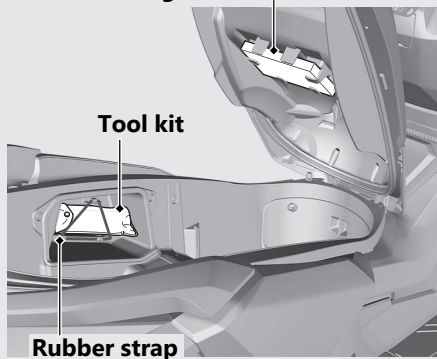

Opening the seat ➞ P.84

Storage Equipment *(Continued)*

Glove Box

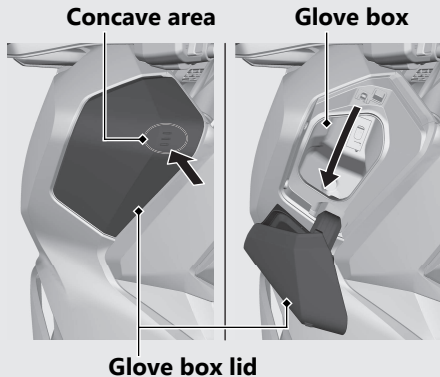

| Open

Push the glove box lid by pressing the concave area on the glove box lid.

| Close

Close the glove box lid.

The maximum allowable load in the glove box shall be no more than

1.5 kg (3.3 lb)

Make sure that the glove box lid is closed securely.

► Do not store valuables or fragile articles.

Maintenance

Please read "Importance of Maintenance" and "Maintenance Fundamentals" carefully before attempting any maintenance. Refer to "Specifications" for service data.

Importance of Maintenance	P. 90
Maintenance Schedule.....	P. 91
Maintenance Fundamentals	P. 96
Tools.....	P. 106
Removing & Installing Body	
Components	P. 107
Battery.....	P. 107
Battery Lid	P. 109
Engine Oil.....	P. 110
Coolant	P. 112
Brakes.....	P. 115
Side Stand	P. 117
Throttle	P. 118
Other Adjustments.....	P. 119

Adjusting the Windscreen Height.....	P. 119
Other Replacement.....	P. 120
Replacing the Honda SMART Key Battery ..	P. 120

Importance of Maintenance

Importance of Maintenance

Keeping your vehicle well-maintained is absolutely essential to your safety and to protect your investment, obtain maximum performance, avoid breakdowns, and reduce air pollution. Maintenance is the owner's responsibility. Be sure to inspect your vehicle before each ride and perform the periodic checks specified in the Maintenance Schedule.

➤ P. 91

WARNING

Improperly maintaining your vehicle or failing to correct a problem before you ride can cause a crash in which you can be seriously hurt or killed.

Always follow the inspection and maintenance recommendations and schedules in this owner's manual.

Maintenance Safety

Always read the maintenance instructions before you begin each task and make sure that you have the tools, parts, and skills required. We cannot warn you of every conceivable hazard that can arise in performing maintenance. Only you can decide whether or not you should perform a given task.

Follow these guidelines when performing maintenance.

- Stop the engine and turn the ignition switch to the  (Off) position.
- Place your vehicle on a firm, level surface using the side stand, centre stand or a maintenance stand to provide support.
- Allow the engine, muffler, brakes, and other high-temperature parts to cool before servicing as you can get burned.
- Run the engine only when instructed, and do so in a well-ventilated area.

Maintenance Schedule

The maintenance schedule specifies the maintenance requirements necessary to ensure safe, dependable performance, and proper emission control.

Maintenance work should be performed in accordance with Honda's standards and specifications by properly trained and equipped technicians. Your dealer meets all of these requirements. Keep an accurate record of maintenance to help ensure that your vehicle is properly maintained.

Make sure that whomever performs the maintenance completes this record.

All scheduled maintenance is considered a normal owner operating cost and will be charged to you by your dealer. Retain all receipts. If you sell the vehicle, these receipts should be transferred with the vehicle to the new owner.

Honda recommends that your dealer should road test your vehicle after each periodic maintenance is carried out.

Maintenance Schedule

FO/III FO/KO/III SI type

Items		Pre-ride Check P. 96	Frequency *1						Annual Check	Regular Replace	Refer to page
			× 1,000 km	1	12	24	36	48			
			× 1,000 mi	0.6	8	16	24	32			
Fuel Line	🔧				I	I	I	I	I		—
Fuel Level		I									—
Throttle Operation	🔧	I			I	I	I	I	I		118
Air Cleaner *2	🔧					R		R			—
Crankcase Breather *3					C	C	C	C			—
Spark Plug					R	R	R	R			—
Valve Clearance	🔧					I		I			—
Engine Oil		I		R	R	R	R	R	R		—
Engine Oil Filter				R		R		R			—
Engine Idle Speed	🔧				I	I	I	I	I		—
Radiator Coolant *4		I			I	I	I	I	I	3 Years	112
Cooling System	🔧				I	I	I	I	I		—
Secondary Air Supply System	🔧					I		I			—
Evaporative Emission Control System	🔧					I		I			—

Maintenance Level

🔧 : Intermediate. We recommend service by your dealer, unless you have the necessary tools and are mechanically skilled.

Procedures are provided in an official Honda Shop Manual.

🔧 : Technical. In the interest of safety, have your vehicle serviced by your dealer.

Maintenance Legend

I : Inspect (clean, adjust, lubricate, or replace, if necessary)

R : Replace

C : Clean

Items		Pre-ride Check P. 96	Frequency *1						Annual Check	Regular Replace	Refer to page
			× 1,000 km	1	12	24	36	48			
			× 1,000 mi	0.6	8	16	24	32			
Drive Belt					I	R	I	R			–
Belt Case Air Cleaner					C	C	C	C			–
Final Drive Oil										2 Years	–
Brake Fluid *4		I			I	I	I	I	I	2 Years	115
Brake Pads Wear		I			I	I	I	I	I		116
Brake System					I	I	I	I	I		96
Headlight Aim					I	I	I	I	I		–
Lights/Horn		I									–
Engine Stop Switch		I									–
Clutch Shoes Wear					I	I	I	I			–
Side Stand		I			I	I	I	I	I		117
Suspension					I	I	I	I	I		–
Nuts, Bolts, Fasteners					I	I	I	I	I		–
Wheels/Tyres		I			I	I	I	I	I		103
Steering Head Bearings					I	I	I	I	I		–

Notes:

*1 : At higher odometer reading, repeat at the frequency interval established here.

*2 : Service more frequently when riding in unusually wet or dusty areas.

*3 : Service more frequently when riding in rain or at full throttle.

*4 : Replacement requires mechanical skill.

Maintenance Schedule

III HK/MA/TH/III TH type

Items		Pre-ride Check P. 96	Frequency *1								Annual Check	Regular Replace	Refer to page
			× 1,000 km	1	6	12	18	24	30	36			
			× 1,000 mi	0.6	4	8	12	16	20	24			
Fuel Line						I		I		I	I		–
Fuel Level		I											–
Throttle Operation		I				I		I		I	I		118
Air Cleaner *2							R			R			–
Crankcase Breather *3					C	C	C	C	C	C			–
Spark Plug						R		R		R			–
Valve Clearance								I					–
Engine Oil		I		R		R		R		R	R		–
Engine Oil Filter				R				R					–
Engine Idle Speed						I		I		I	I		–
Radiator Coolant *4		I				I		I		I	I	3 Years	112
Cooling System						I		I		I	I		–
Secondary Air Supply System								I					–
Evaporative Emission Control System								I					–

Maintenance Level

 : Intermediate. We recommend service by your dealer, unless you have the necessary tools and are mechanically skilled.

Procedures are provided in an official Honda Shop Manual.

 : Technical. In the interest of safety, have your vehicle serviced by your dealer.

Maintenance Legend

I : Inspect (clean, adjust, lubricate, or replace, if necessary)

R : Replace

C : Clean

Items		Pre-ride Check P. 96	Frequency *1								Annual Check	Regular Replace	Refer to page
			× 1,000 km	1	6	12	18	24	30	36			
			× 1,000 mi	0.6	4	8	12	16	20	24			
Drive Belt						I		R		I			–
Belt Case Air Cleaner						C		C		C			–
Final Drive Oil*4												2 Years	–
Brake Fluid *4		I			I	I	I	I	I	I	I	2 Years	115
Brake Pads Wear		I			I	I	I	I	I	I	I		116
Brake System						I		I		I	I		96
Headlight Aim						I		I		I	I		–
Lights/Horn		I											–
Engine Stop Switch		I											–
Clutch Shoes Wear						I		I		I			–
Side Stand		I				I		I		I	I		117
Suspension						I		I		I	I		–
Nuts, Bolts, Fasteners						I		I		I	I		–
Wheels/Tyres		I				I		I		I	I		103
Steering Head Bearings						I		I		I	I		–

Notes:

*1 : At higher odometer reading, repeat at the frequency interval established here.

*2 : Service more frequently when riding in unusually wet or dusty areas.

*3 : Service more frequently when riding in rain or at full throttle.

*4 : Replacement requires mechanical skill.

Pre-ride Inspection

To ensure safety, it is your responsibility to perform a pre-ride inspection and make sure that any problem you find is corrected. A pre-ride inspection is a must, not only for safety, but because having a breakdown, or even a flat tyre, can be a major inconvenience.

Check the following items before you get on your vehicle:

- Fuel level - Fill fuel tank when necessary ➤ P. 80
- Throttle - Check for smooth opening and full closing in all steering positions ➤ P. 118
- Engine oil level - Add engine oil if necessary. Check for leaks ➤ P. 110
- Coolant level - Add coolant if required. Check for leaks ➤ P. 112

- Brakes - Check operation;
Front and Rear: check brake fluid level and pads wear ➤ P. 115, ➤ P. 116
- Lights and horn - Check that lights, indicators and horn function properly
- Engine stop switch - Check for proper function ➤ P. 40
- Side stand ignition cut-off system - Check for proper function ➤ P. 117
- Wheels and tyres - Check condition, air pressure and adjust if necessary ➤ P. 103


Replacing Parts

Always use Honda Genuine Parts or their equivalents to ensure reliability and safety.

III HK/KO/III SI type

When ordering coloured components, specify the model name, colour, and code mentioned on the colour label.

The colour label is attached to the luggage box under the seat. ➡ P. 84

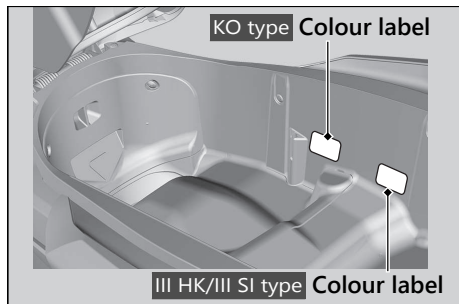

⚠ WARNING

Installing non-Honda parts may make your vehicle unsafe and cause a crash in which you can be seriously hurt or killed.

Always use Honda Genuine Parts or equivalents that have been designed and approved for your vehicle.

Battery

Your vehicle has a maintenance-free type battery. You do not have to check the battery electrolyte level or add distilled water. Clean the battery terminals if they become dirty or corroded.

Do not remove the battery cap seals. There is no need to remove the cap when charging.

NOTICE

Your battery is a maintenance-free type and can be permanently damaged if the cap strip is removed.



This symbol on the battery means that this product must not be treated as household waste.

NOTICE

An improperly disposed of battery can be harmful to the environment and human health. Always confirm local regulations for proper battery disposal instruction.

What to do in an emergency

If any of the following occur, immediately see your doctor.

- Electrolyte splashes into your eyes:
 - ▶ Wash your eyes repeatedly with cool water for at least 15 minutes. Using water under pressure can damage your eyes.
- Electrolyte splashes onto your skin:
 - ▶ Remove affected clothing and wash your skin thoroughly using water.
- Electrolyte splashes into your mouth:
 - ▶ Rinse mouth thoroughly with water, and do not swallow.

⚠ WARNING

The battery gives off explosive hydrogen gas during normal operation.

A spark or flame can cause the battery to explode with enough force to kill or seriously hurt you.


Wear protective clothing and a face shield, or have a skilled mechanic do the battery servicing.

Cleaning the Battery Terminals

1. Remove the battery. ➡ P. 107
2. If the terminals are starting to corrode and are coated with a white substance, wash with warm water and wipe clean.

Maintenance Fundamentals

3. If the terminals are heavily corroded, clean and polish the terminals with a wire brush or sandpaper. Wear safety glasses.

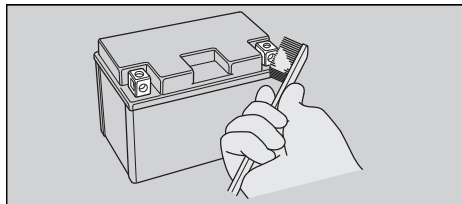

4. After cleaning, reinstall the battery.

The battery has a limited life span. Consult your dealer about when you should replace the battery. Always replace the battery with another maintenance-free battery of the same type.

NOTICE


Installing non-Honda electrical accessories can overload the electrical system, discharging the battery and possibly damaging the system.

Fuses

Fuses protect the electrical circuits on your vehicle. If something electrical on your vehicle stops working, check for and replace any blown fuses. ➡ P. 143

Inspecting and Replacing Fuses

Turn the ignition switch to the  (Off) position to remove and inspect fuses. If a fuse is blown, replace with a fuse of the same rating. For fuse ratings, see "Specifications." ➡ P. 168

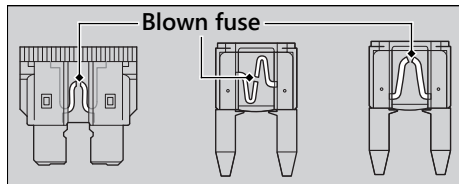

NOTICE

Replacing a fuse with one that has a higher rating greatly increases the chance of damage to the electrical system.

If a fuse fails repeatedly, you likely have an electrical fault. Have your vehicle inspected by your dealer.

Engine Oil

Engine oil consumption varies and oil quality deteriorates according to riding conditions and time elapsed.

Check the engine oil level regularly, and add the recommended engine oil if necessary. Dirty oil or old oil should be changed as soon as possible.


Selecting the Engine Oil

For recommended engine oil, see "Specifications." ▣ P. 167


If you use non-Honda engine oil, check the label to make sure that the oil satisfies all of the following standards:

- JASO T 903 standard*1: MB
- SAE standard*2: 10W-30
- API classification*3: SJ or higher

- *1. The JASO T 903 standard is an index for engine oils for 4-stroke motorcycle engines. There are two classes: MA and MB. For example, the following label shows the MB classification.



- *2. The SAE standard grades oils by their viscosity.
- *3. The API classification specifies the quality and performance rating of engine oils. Use SJ or higher oils, excluding oils marked as "Energy Conserving" or "Resource Conserving" on the circular API service symbol.

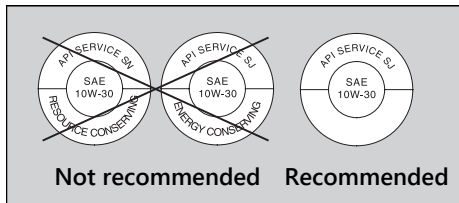

Brake Fluid

Do not add or replace brake fluid, except in an emergency. Use only fresh brake fluid from a sealed container. If you do add fluid, have the brake system serviced by your dealer as soon as possible.

NOTICE

Brake fluid can damage plastic and painted surfaces.
Wipe up spills immediately and wash thoroughly.

Recommended brake fluid:

Honda DOT 4 Brake Fluid or equivalent

Recommended Coolant

KO type

Pro Honda HP Coolant is a pre-mixed solution of antifreeze and distilled water.

Concentration:

50% antifreeze and 50% distilled water

A concentration of antifreeze below 40% will not provide proper corrosion and cold temperature protection.

A concentration of up to 60% will provide better protection in colder climates.

Except KO type

Use only genuine HONDA PRE-MIX COOLANT without diluting with water. Genuine HONDA PRE-MIX COOLANT is excellent at preventing corrosion and overheating.

The coolant should be inspected and replaced properly by following the maintenance schedule. 📄 P. 91

NOTICE

Using coolant not specified for aluminium engines or tap/mineral water can cause corrosion.


Crankcase Breather

Service more frequently when riding in rain, at full throttle, or after the vehicle is washed or overturned. Service if the deposit level can be seen in the transparent section of the drain tube.

If the drain tube overflows, the air filter may become contaminated with engine oil, causing poor engine performance.

Tyres (Inspecting/Replacing)**Checking the Air Pressure**


Visually inspect your tyres and use an air pressure gauge to measure the air pressure at least once a month or any time you think the tyres look low. Always check air pressure when your tyres are cold.

Inspecting for Damage

Inspect the tyres for cuts, slits, or cracks that expose fabric or cords, or nails or other foreign objects embedded in the side of the tyre or the tread.

Also inspect for any unusual bumps or bulges in the side walls of the tyres.


Inspecting for Abnormal Wear



Inspect the tyres for signs of abnormal wear on the contact surface.

Inspecting Tread Depth

Inspect the tread wear indicators. If they become visible, replace the tyres immediately. For safe riding, you should replace the tyres when the minimum tread depth is reached.

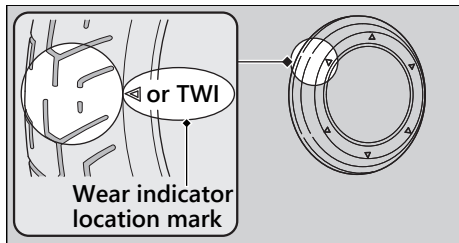

⚠ WARNING

Riding on tyres that are excessively worn or improperly inflated can cause a crash in which you can be seriously hurt or killed.

Follow all instructions in this owner's manual regarding tyre inflation and maintenance.

Have your tyres replaced by your dealer. For recommended tyres, air pressure, and minimum tread depth, see "Specifications."

➤ P. 167

Follow these guidelines whenever you replace tyres:

- Use the recommended tyres or their equivalents of the same size, construction, speed rating, and load range.
- Have the wheel balanced with Honda Genuine balance weights or equivalent after the tyre is installed.
- Do not install a tube inside a tubeless tyre on this vehicle. Excessive heat build-up can cause the tube to burst.
- Use only tubeless tyres on this vehicle. The rims are designed for tubeless tyres, and during hard acceleration or braking, a tube-type tyre could slip on the rim and cause the tyre to rapidly deflate.

WARNING

Installing improper tyres on your vehicle can adversely affect handling and stability, and can cause a crash in which you can be seriously hurt or killed.


Always use the size and type of tyres recommended in this owner's manual.

The tool kit is stored in the luggage box. ➤ P. 87

You can perform some roadside repairs, minor adjustments and parts replacement with the provided tools.

- 10 x 14 mm Open end wrench
- Standard/Phillips screwdriver
- Screwdriver handle
- Spark plug wrench
- Helmet set wire
- Fuse puller
- 5 mm Hex wrench

Battery

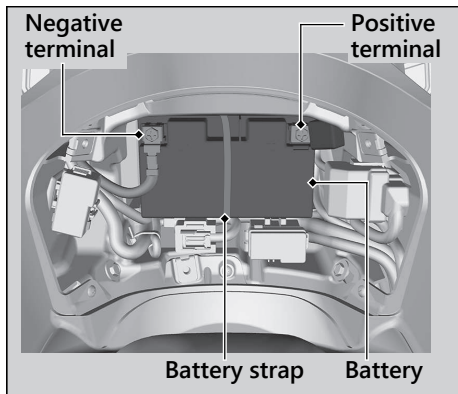

Removal

Make sure the ignition switch is in the **O** (Off) position.

1. Remove the battery lid. ➡ P. 109
2. Disconnect the negative $\ominus$ terminal from the battery.
3. Disconnect the positive $\oplus$ terminal from the battery.
4. Remove the battery, taking care not to drop the terminal nuts.
 - ▶ Remove the battery by pulling the battery strap with one hand while supporting the battery with the other.

Installation

Install the parts in the reverse order of removal. Always connect the positive ⊕ terminal first. Make sure bolts and nuts are tight.

Make sure the clock information is correct after the battery is reconnected. ➤ P. 33


Except FO/III FO type

The anti-theft alarm system will be deactivated if the battery is disconnected. The system will remain off when the battery is reconnected.

To activate the system, turn the ignition switch to the **I** (On) position once.

For proper handling of the battery, see "Maintenance Fundamentals." ➤ P. 98
"Battery Goes Dead." ➤ P. 142

Battery Lid

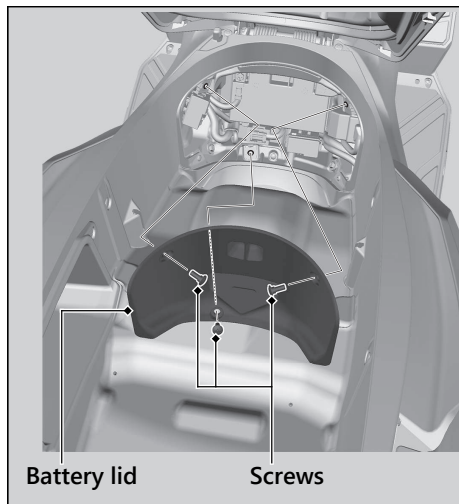

Removal


1. Open the seat. ► P. 84
2. Remove the screws.
3. Remove the battery lid.

Installation

Install the parts in the reverse order of removal.

Checking the Engine Oil

1. If the engine is cold, idle the engine for 3 to 5 minutes.
2. Turn the ignition switch to the **○** (Off) position and wait for 2 to 3 minutes.
3. Place your vehicle on its centre stand on a firm, level surface.
4. Remove the oil fill cap/dipstick and wipe it clean.
5. Insert the oil fill cap/dipstick until it seats, but don't screw it in.
6. Check that the oil level is between the upper level and lower level marks on the oil fill cap/dipstick.
7. Securely install the oil fill cap/dipstick.

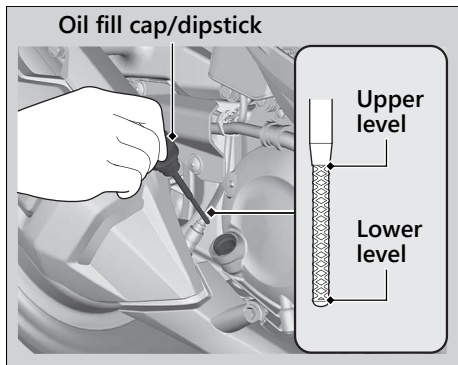

Adding Engine Oil

If the engine oil is below or near the lower level mark, add the recommended engine oil.

► P. 101, ► P. 167

1. Remove the oil fill cap/dipstick. Add the recommended oil until it reaches the upper level mark.
 - Place your vehicle on its centre stand on a firm, level surface when checking the oil level.
 - Do not overfill above the upper level mark.
 - Make sure no foreign objects enter the oil filler opening.
 - Wipe up any spills immediately.
2. Securely reinstall the oil fill cap/dipstick.

NOTICE

Overfilling with oil or operating with insufficient oil can cause damage to your engine. Do not mix different brands and grades of oil.

For the recommended oil and oil selection guidelines, see "Maintenance Fundamentals."


► P. 101

Checking the Coolant

Check the coolant level in the reserve tank while the engine is cold.

1. Place your vehicle on a firm, level surface.
2. Hold your vehicle in an upright position.
3. Check that the coolant level is between the UPPER level and LOWER level marks on the reserve tank.

If the coolant level is dropping noticeably or the reserve tank is empty, you likely have a serious leak. Have your vehicle inspected by your dealer.

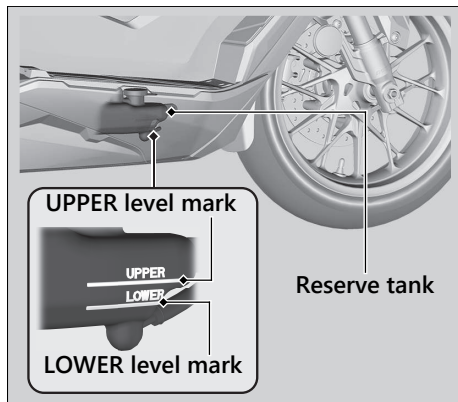


Adding Coolant

If the coolant level is below the LOWER level mark, add the recommended coolant (► P. 102) until the level reaches the UPPER level mark.

Add fluid only from the reserve tank cap and do not remove the radiator cap.

1. Pull the floor mat off.
2. Remove the reserve tank lid by using a flat head screwdriver covered with a protective cloth.

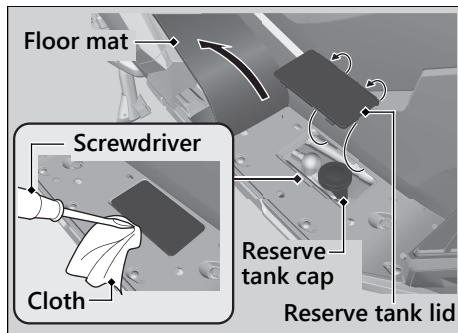

Coolant ► Adding Coolant

3. Remove the reserve tank cap and add fluid while monitoring the coolant level.
 - Do not overfill above the UPPER level mark.
 - Make sure no foreign objects enter the reserve tank opening.
4. Securely reinstall the reserve tank cap.
5. Install the reserve tank lid.
6. Install the floor mat.

WARNING

Removing the radiator cap while the engine is hot can cause the coolant to spray out, potentially scalding you.


Always let the engine and radiator cool down before removing the radiator cap.

Checking Brake Fluid

1. Place your vehicle in an upright position on a firm, level surface.
2. Check that the brake fluid reservoir is horizontal and that the fluid level is above the LOWER level mark.

If the brake fluid level in either reservoir is below the LOWER level mark or both the brake levers freeplay becomes excessive, inspect the brake pads for wear.

If the brake pads are not worn, you most likely have a leak. Have your vehicle inspected by your dealer.

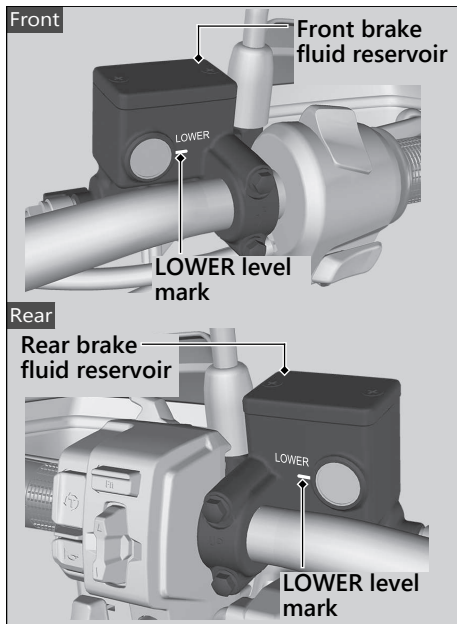

Inspecting the Brake Pads


Check the condition of the brake pad wear indicators.

The pads need to be replaced if a brake pad is worn to the indicator.


1. **Front** Inspect the brake pads from below the brake caliper.
2. **Rear** Inspect the brake pads from the rear of the vehicle.

If necessary, have the pads replaced by your dealer.

Always replace both left and right brake pads at the same time.

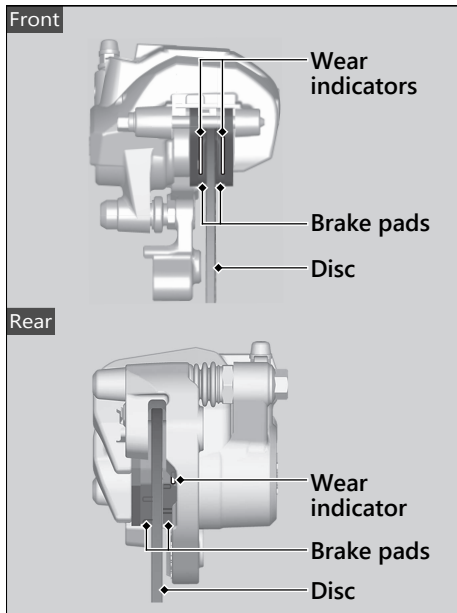

Checking the Side Stand

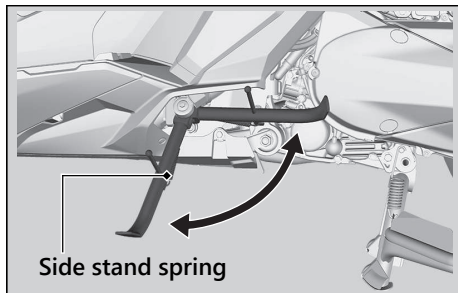

1. Place your vehicle on its centre stand on a firm, level surface.
2. Check that the side stand operates smoothly. If the side stand is stiff or squeaky, clean the pivot area and lubricate the pivot bolt with clean grease.
3. Check the spring for damage or loss of tension.


4. Sit on the vehicle and raise the side stand.
5. Start the engine.
6. Lower the side stand all the way. The engine should stop as you lower the side stand. If the engine doesn't stop, have your vehicle inspected by your dealer.

Checking the Throttle

With the engine off, check that the throttle rotates smoothly from fully closed to fully open in all steering positions and throttle freeplay is correct. If the throttle does not move smoothly or close automatically, or if the cable is damaged, have the vehicle inspected by your dealer.

Freeplay at the throttle grip flange:

2 - 6 mm (0.1 - 0.2 in)

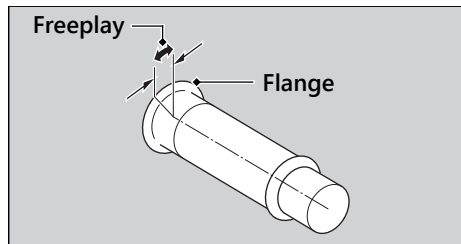

Adjusting the Windscreen Height

You can adjust your windscreen height 1 of 4 position.

The standard position is 1.

► Do not adjust the windscreen while riding.


Pull the windscreen adjusting knobs and move the windscreen up or down.

► Make sure the windscreen is locked securely by slightly moving the windscreen up or down.

Check the windscreen adjustment for smooth operation and check the sliding area for looseness.

► Do not apply grease or other oil to the sliding parts.

If the windscreen does not move smoothly, flush the sliding parts with water to remove dust. If the windscreen does not move smoothly after flushing the sliding parts, have your vehicle inspected by your dealer.

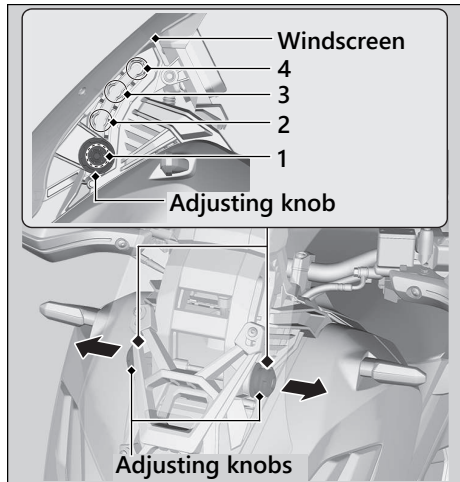


Replacing the Honda SMART Key Battery

If the Honda SMART Key indicator flashes 5 times when the ignition switch is turned **I** (On) position, or the operating range becomes unstable, replace the battery as soon as possible.

We recommend to see your dealer for this service.

Battery type: CR2032/CR2032H

1. Remove the upper case by inserting a coin or a flat head screwdriver covered with a protective cloth into the slit.
 - ▶ Wrap a coin or a screwdriver with a protective cloth to prevent scratching the Honda SMART Key.
 - ▶ Do not touch the circuit or terminal. This may cause problems.
 - ▶ Be careful to avoid scratching the waterproof covering or allowing dust to enter.
 - ▶ Do not forcibly dismantle the Honda SMART Key body.

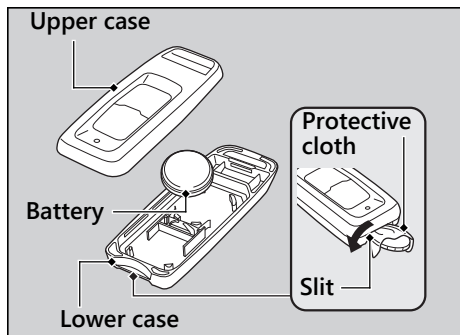

2. Replace the old battery with a new battery with the negative $\ominus$ side facing up.
3. Snap the two halves of the case back together.
 - Make sure that upper and lower cases are set in the right position.

⚠ WARNING

CHEMICAL BURN HAZARD

The battery that powers the Honda SMART Key can cause severe internal burns and can even lead to death if swallowed.

Keep new and used batteries away from children.

If you suspect that a child has swallowed the battery, seek medical attention immediately.

CAUTION

- Danger of explosion if battery is incorrectly replaced. Replace only with the same or equivalent type.
- Do not exposed to excessive heat such as sunshine, fire or the like, that can result in an explosion or the leakage of flammable liquid or gas during use, storage or transportation.
- Do not dispose of a battery into fire or a hot oven, or give mechanically crushing or cutting of a battery, that can result in an explosion.
- Do not subjected to extremely low air pressure at high altitude that may result in an explosion or the leakage of flammable liquid or gas.

Troubleshooting

Engine Will Not Start	P. 124
Overheating (High coolant temperature indicator is on)	P. 125
Warning Indicators On or Flashing	P. 126
Low Oil Pressure Indicator	P. 126
PGM-FI (Programmed Fuel Injection)	
Malfunction Indicator Lamp (MIL).....	P. 127
ABS (Anti-lock Brake System) Indicator	P. 128
Torque Control Indicator.....	P. 129
Honda SMART Key Indicator	P. 130
Other Warning Indications	P. 131
Fuel Gauge Failure Indication.....	P. 131
When the Honda SMART Key System Does Not Operate Properly	P. 132

Unlock the Seat in an Emergency	P. 134
Unlock the Ignition Switch in an Emergency	P. 136
Tyre Puncture	P. 139
Smartphone Pairing Trouble	P. 140
Electrical Trouble	P. 142
Battery Goes Dead.....	P. 142
Burned-out Light Bulb	P. 142
Blown Fuse	P. 143
Unstable Engine Operation Occurs Intermittently	P. 146

Starter Motor Operates But Engine Does Not Start

Check the following items:

- Check the correct engine starting sequence. ➡ P. 73
- Check that there is petrol in the fuel tank.
- Check if the PGM-FI malfunction indicator lamp (MIL) is on.
 - ▶ If the indicator lamp is on, contact your dealer as soon as possible.

Starter Motor Does Not Operate

Check the following items:

- Check the correct engine starting sequence. ➡ P. 73
- Make sure engine stop switch is in the  (Run) position. ➡ P. 40
- Check for a blown fuse. ➡ P. 143
- Check for a loose battery connection (➡ P. 107) or battery terminal corrosion (➡ P. 98).
- Check the condition of the battery.
 - ➡ P. 142

If the problem continues, have your vehicle inspected by your dealer.

Overheating (High coolant temperature indicator is on)

The engine is overheating when the following occurs:

- High coolant temperature indicator comes on.
- Acceleration becomes sluggish.

If this occurs, pull safely to the side of the road and perform the following procedure. Extended fast idling may cause the high coolant temperature indicator to come on.

NOTICE

Continuing to ride with an overheated engine can cause serious damage to the engine.

1. Stop the engine using the ignition switch, and then turn the ignition switch to the **I** (On) position.

2. Check that the radiator fan is operating, and then turn the ignition switch to the **O** (Off) position.

If the fan is not operating:

Suspect a fault. Do not start the engine. Transport your vehicle to your dealer.

If the fan is operating:

Allow the engine to cool with the ignition switch in the **O** (Off) position.

3. After the engine has cooled, inspect the radiator hose and check if there is a leak.
➡ P. 112

If there is a leak:

Do not start the engine. Transport your vehicle to your dealer.

4. Check the coolant level in the reserve tank. ➡ P. 112
▶ Add coolant as necessary.
5. If 1-4 check normal, you may continue riding, but closely monitor the high coolant temperature indicator.

Low Oil Pressure Indicator

If the low oil pressure indicator comes on, pull safely to the side of the road and stop the engine.

NOTICE

Continuing to ride with low oil pressure can cause serious damage to the engine.

1. Check the engine oil level, and add oil as necessary. 📄 P. 110, 📄 P. 111
2. Start the engine.
 - ▶ Only continue riding if the low oil pressure indicator goes off.

Rapid acceleration may momentarily cause the low oil pressure indicator to come on, especially if the oil is at or near the low level. If the low oil pressure indicator stays on when the oil level is at the proper level, stop the engine and contact your dealer.

If the engine oil level goes down rapidly, your vehicle may have a leak or another serious problem. Have your vehicle inspected by your dealer.

PGM-FI (Programmed Fuel Injection) Malfunction Indicator Lamp (MIL)

Except KO type

If the indicator comes on while riding, you may have a serious problem with the PGM-FI system. Reduce speed and have your vehicle inspected by your dealer as soon as possible.

KO type only

Reasons for the indicator lamp to come on or blink

- Comes on if there is a problem with the engine emissions control system.
- Blinks when engine misfiring is detected.

What to do when the indicator lamp comes on

Avoid high speeds and immediately get your vehicle inspected at a dealer.

NOTICE

If you drive with the malfunction indicator lamp on, the emissions control system and the engine could be damaged.

What to do when the indicator lamp blinks

Park the vehicle in a safe place with no flammable items and wait at least 10 minutes with the engine stopped until it cools.

NOTICE

If the malfunction indicator lamp blinks again when restarting the engine, drive to the nearest dealer at 50 km/h (31 mph) or less. Have your vehicle inspected.

ABS (Anti-lock Brake System) Indicator

If the indicator operates in one of the following ways, you may have a serious problem with the ABS. Reduce your speed and have your vehicle inspected by your dealer as soon as possible.

- Indicator comes on or starts flashing while riding.
- Indicator does not come on when the ignition switch is in the **I** (On) position.
- Indicator does not go off at speeds above 10 km/h (6 mph).

If the ABS indicator stays on, your brakes will continue to work as a conventional system, but without the anti-locking function.

The ABS indicator may flash if you turn the rear wheel while the rear wheel is lifted off the ground. In this case, turn the ignition switch to the **O** (Off) position, and then to the **I** (On) position again. The ABS indicator will go off after your speed reaches 30 km/h (19 mph).

Torque Control Indicator

If the indicator operates in one of the following ways, you may have a serious problem with the Torque Control. Reduce your speed and have your vehicle inspected by your dealer as soon as possible.

- Indicator comes and stays on (solid) while riding.
- Indicator does not come on when the ignition switch is turned to the **I** (On) position.
- Indicator does not go off at speeds above 3 km/h (2 mph).

Even when the Torque Control indicator is on, your vehicle will have normal riding ability without Torque Control function.

- When the indicator comes on while the Torque Control is in operation, you will have to completely close the throttle to regain normal riding ability.

The Torque Control indicator may come on if you rotate the rear wheel while your vehicle is lifted off the ground. In this case, turn the ignition switch to the **O** (Off) position, and then to the **I** (On) position again. The Torque Control indicator will go off after your speed reaches 3 km/h (2 mph).

Honda SMART Key Indicator

When the Honda SMART Key indicator flashes 5 times

Replacing the Honda SMART Key Battery ▢ P. 120

When the Honda SMART Key indicator is flashing while the ignition switch is in the (On) position

The Honda SMART Key indicator flashes when communication between your vehicle and Honda SMART Key stops after turning the ignition switch to the (On) position. It is probably caused by the following:

- Strong radio waves or noise are affecting the system
 - You lose the Honda SMART Key while riding
- However, this does not affect the operation of your vehicle until stop the engine.

If you turn the ignition switch to the SEAT FUEL, (Off) or (Lock) position while the Honda SMART Key indicator is flashing, the ignition switch ring, and the Honda SMART Key indicator will flash faster for about 20 seconds, automatically go off, and then the ignition switch will be locked.

Except FO/III FO type

The buzzer also rings before the ignition switch will be locked.

► Turn signals blink at the beginning and end of this function.

To stop this flashing, press and hold the ignition switch for more than 2 seconds. After the flashing stops, the ignition switch is locked.



If you do not have the Honda SMART Key, the ignition switch can be unlocked in another way. ▢ P. 136

Other Warning Indications

Fuel Gauge Failure Indication

If the fuel system has an error, the fuel gauge indicators will be displayed as shown in the illustration.

If this occurs, see your dealer as soon as possible.

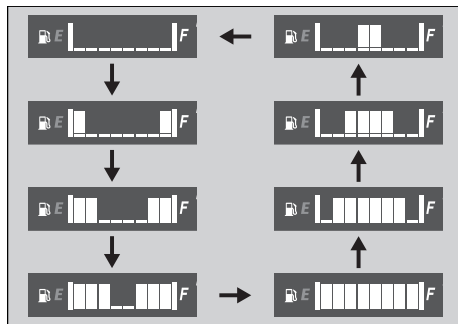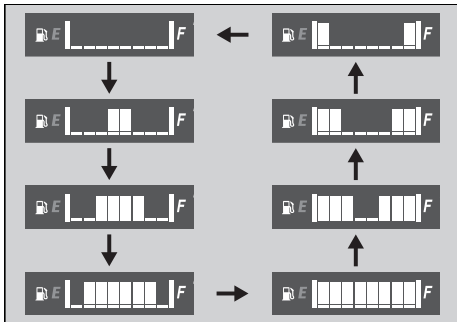

When the Honda SMART Key System Does Not Operate Properly

When the Honda SMART Key system does not work properly, perform the following.

- Check that the Honda SMART Key system is activated.

Lightly push the ON/OFF button on the Honda SMART Key.

If the Honda SMART Key LED is red, activate the Honda SMART Key system.

➡ P. 46

If the Honda SMART Key LED does not respond, replace the battery. ➡ P. 120

- Check that there is no communication failure in the Honda SMART Key system. The Honda SMART Key system uses low-intensity radio waves. The Honda SMART Key system may not work properly in the following conditions:
 - ▶ When there are facilities nearby that generate strong radio waves or noise such as TV towers, power stations, radio stations, or airports.
 - ▶ When you carry the Honda SMART Key with a laptop or wireless communication device such as a radio or mobile phone.
 - ▶ When the Honda SMART Key comes into contact with or is covered by metal objects.

When the Honda SMART Key System Does Not Operate Properly

- Check that a registered Honda SMART Key is used.
Use a registered Honda SMART Key.
The Honda SMART Key system cannot be activated without a registered Honda SMART Key.
- Make sure that you do not use a broken Honda SMART Key.
If you use a broken Honda SMART Key, the Honda SMART Key system cannot be activated. Bring the emergency key and ID tag to your dealer.

- Check the battery condition and battery lead in your vehicle.
Check the battery and battery terminals. If the battery is weak, contact your dealer.


If the Honda SMART Key system cannot be activated due to other causes, contact your dealer.

Unlock the Seat in an Emergency

The seat lock can be unlocked by using the emergency key.

Open


1. Pull the emergency seat opener lid upward to release the prongs.

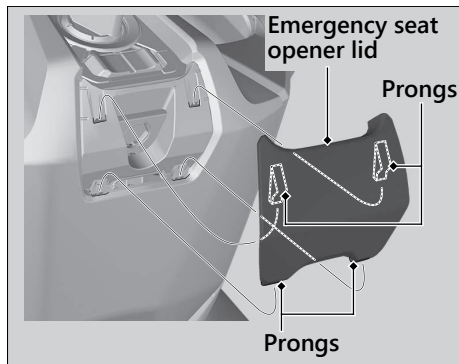

2. Align the projection of the emergency key with the slot of the emergency seat opener, and turn the emergency key counterclockwise.
3. Open the seat and turn the emergency key clockwise

Close


1. Close and push down on the rear of the seat until it locks. Make sure that the seat is locked securely by pulling it up lightly. If the seat is not locked, turn the emergency key clockwise to lock the seat catch.
2. Install the emergency seat opener lid in the reverse order of removal.
 - Make sure that all prongs are installed securely in position.

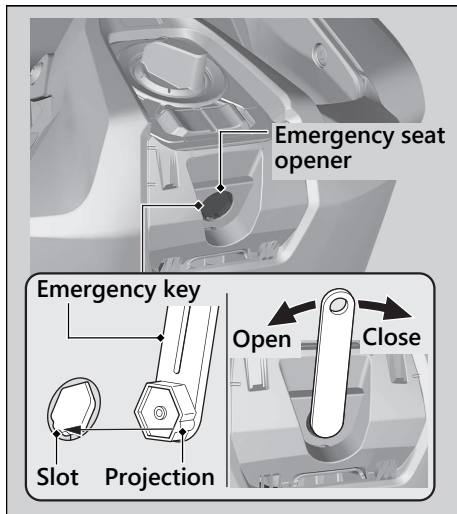

Unlock the Ignition Switch in an Emergency

Set up to ID number input mode

1. Check the ID number on the ID tag.
2. Press and hold the ignition switch for more than 4 seconds.
 - ▶ The ignition switch ring and the Honda SMART Key indicator flash.
3. Press the ignition switch while the ignition switch ring and the Honda SMART Key indicator are flashing.
 - ▶ The ignition switch ring and the Honda SMART Key indicator stay lit, and the ID number input mode turns on.

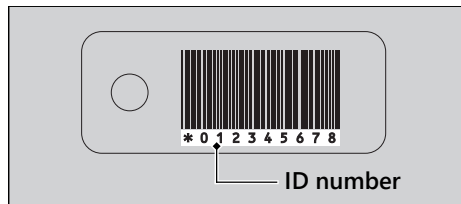

ID number input

You can input your ID number by pressing the ignition switch when the ignition switch is in the  (Off),  (Lock) or SEAT FUEL position. Input the ID number on the ID tag in order from the left in turn by pressing the ignition switch.


The ID number is authenticated according to the number of times the ignition switch is pushed.

Push the ignition switch the desired number of times within 5 seconds when the ignition switch ring comes on. After 5 seconds, the ignition switch ring goes off and comes on again. This means that the input number is fixed, and you can input the next number.

- ▶ **Except FO/III FO type** The buzzer also rings after inputting each number.
- ▶ If the ignition switch ring does not come on in blue, the battery may be low. Contact your dealer.

Example:

- To input "0", wait for 5 seconds without pushing the ignition switch when the ignition switch ring comes on.
- To input "1", push the ignition switch once within 5 seconds when the ignition switch ring comes on.

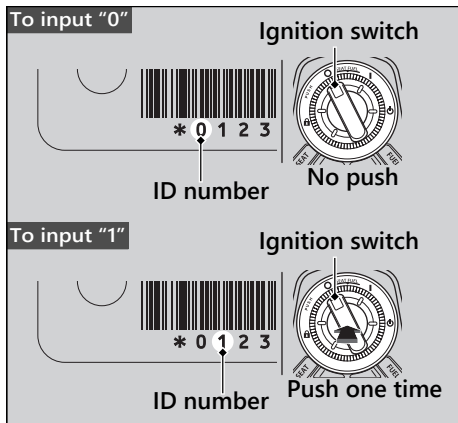

ID number input success

After the last ID number is input, the ignition switch ring and the Honda SMART Key indicator go off, and when they come on again the ignition switch is unlocked.

► **Except FO/III FO type** The buzzer also rings 3 times after inputting last ID number.

Turn the ignition switch to the **I** (On) position within 6 minutes. You can start the engine.

To lock the ignition switch, turn the ignition switch to the SEAT, **O** (Off), or **L** (Lock) position, and press and hold the ignition switch for 2 seconds. The ignition switch also locks automatically when the ignition switch has been in the SEAT, **O** (Off), or **L** (Lock) position for about 6 minutes after the ID number is successfully input.

When the ignition switch is locked, the ignition switch ring goes off.

To unlock the ignition switch again, repeat the procedure for unlocking the ignition switch.

Unlock the Ignition Switch in an Emergency

ID number input failure

After the last ID number is input, the ignition switch ring and the Honda SMART Key indicator flash at 1 second intervals, and then go off.

- ▶ **Except FO/III FO type** The buzzer also rings at this time.

The ignition switch does not unlock.

Redo the "Unlock the Ignition Switch in an Emergency" procedure. ➡ P. 136

ID number input cancel

If you make a mistake while inputting your ID, press and hold the ignition switch for 2 seconds or do not press the ignition switch, just wait for the ignition switch ring and the Honda SMART Key indicator to turn off.

- ▶ **Except FO/III FO type** The buzzer also rings at this time.

Redo the "Unlock the Ignition Switch in an Emergency" procedure. ➡ P. 136

Tyre Puncture

Repairing a puncture or removing a wheel requires special tools and technical expertise. We recommend you have this type of service performed by your dealer.

After an emergency repair, always have the tyre inspected/replaced by your dealer.

Emergency Repair Using a Tyre Repair Kit

If your tyre has a minor puncture, you can make an emergency repair using a tubeless tyre repair kit.

Follow the instructions provided with the emergency tyre repair kit.

Riding your vehicle with a temporary tyre repair is very risky. Do not exceed 50 km/h (30 mph). Have the tyre replaced by your dealer as soon as possible.

WARNING

Riding your vehicle with a temporary tyre repair can be risky. If the temporary repair fails, you can crash and be seriously injured or killed.

If you must ride with a temporary tyre repair, ride slowly and carefully and do not exceed 50 km/h (30 mph) until the tyre is replaced.

Smartphone Pairing Trouble

III FO/III HK/III SI/III TH type

Symptom	Cause/remedy
Unable to pair a smartphone	Some smartphones you use may be incompatible with the vehicle and/or the operable functions may be limited.
	Check that the vehicle and smartphone are both in pairing mode. ➡ P. 69
	Check your surroundings to make sure no other device being paired is present before re-pairing. Presence of a <i>Bluetooth</i> ® device in the vicinity sometimes affects the pairing due to radio wave interference, etc.
	When connecting a smartphone, make sure no other <i>Bluetooth</i> ® device readied for pairing is present. Presence of a <i>Bluetooth</i> ® device in the vicinity sometimes affects the pairing due to radio wave interference, etc.
	Check that the vehicle pairing information is deleted from your smartphone <i>Bluetooth</i> ® setting. Depending on the smartphone used, connecting may not be possible unless the pairing information is deleted.

Symptom	Cause/remedy
Unable to connect a smartphone	Depending on the smartphone you use, it may take some time for the vehicle to connect to a smartphone and to start using a dedicated application.
	The connection may be temporarily disconnected when starting the engine, which is normal and not a malfunction. The smartphone will be reconnected after the engine is started.
	Check that <i>Bluetooth</i> ® status icon comes on. Refer to the instruction manual of your smartphone and check that your smartphone is in connectable state.
	Some smartphones you use may not connect automatically. For connecting, follow the instructions in the instruction manual of your smartphone.
	You cannot connect two or more smartphones at once.

If the problem continues after the above-described inspection, have your vehicle inspected by your dealer.

Battery Goes Dead

Charge the battery using a motorcycle battery charger.

Remove the battery from the vehicle before charging.

Do not use an automobile-type battery charger, as these can overheat a motorcycle battery and cause permanent damage. If the battery does not recover after recharging, contact your dealer.

NOTICE

Jump starting using an automobile battery can damage your vehicle's electrical system and is not recommended.

Burned-out Light Bulb


All light bulbs on the vehicle are LEDs. If there is an LED which is not turned on, see your dealer for servicing.

Blown Fuse

Before handling fuses, see "Inspecting and Replacing Fuses." ▢ P. 100

■ Fuse Box Fuses


1. Remove the battery lid. ▢ P. 109
2. Open the fuse box covers.
3. Pull the fuses out one by one with the fuse puller in the tool kit (▢ P. 87) and check for a blown fuse. Always replace a blown fuse with a spare fuse of the same rating.
4. Close the fuse box covers.
5. Reinstall parts in the reverse order of removal.

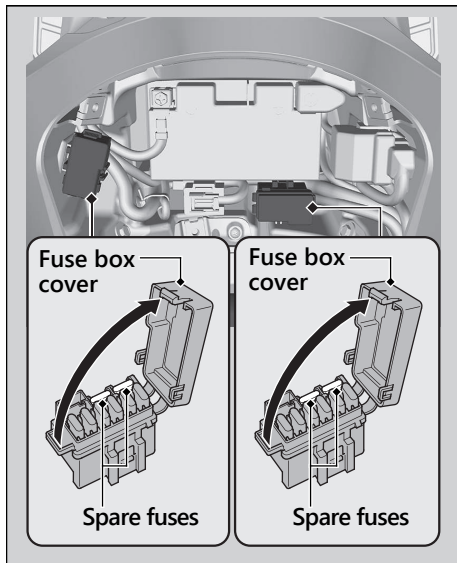


■ Main Fuse

1. Remove the battery lid. ► P. 109
2. Remove the starter magnetic switch from the stays.

Starter magnetic switch

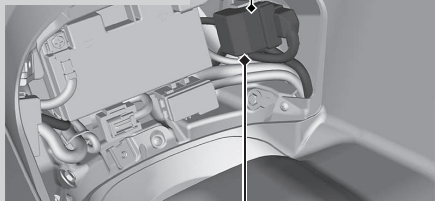


Stays

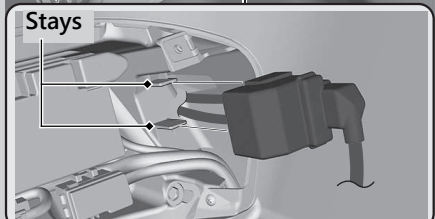

3. Remove the starter magnetic switch cover.
4. Pull the main fuse out and check for a blown fuse.
► Spare main fuse is provided in the starter magnetic switch.
5. Reinstall the parts in the reverse order of removal.

NOTICE

If a fuse fails repeatedly, you likely have an electrical problem. Have your vehicle inspected by your dealer.

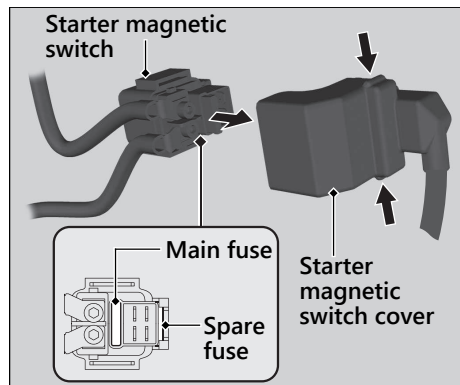

Unstable Engine Operation Occurs Intermittently

If the fuel pump filter is clogged, unstable engine operation will occur intermittently while riding.

Even if this symptom occurs, you can continue to ride your vehicle.

If unstable engine operation occurs even if sufficient fuel is available, have your vehicle inspected by your dealer as soon as possible.

Information

Service Diagnostic Recorders	P. 148
Keys.....	P. 149
Instruments, Controls, & Other Features...	P. 154
Caring for Your Vehicle.....	P. 156
Storing Your Vehicle.....	P. 160
Transporting Your Vehicle	P. 161
You & the Environment	P. 162
Serial Numbers	P. 163
Fuels Containing Alcohol	P. 164
Catalytic Converter	P. 165

Service Diagnostic Recorders

KO type only

Your vehicle is equipped with service-related devices that record information about powertrain performance and riding conditions. The data can be used to help technicians diagnose, repair and maintain the vehicle. This data may not be accessed by anyone else except as legally required or with the permission of the vehicle owner.

However this data may be accessed by Honda, its authorised dealers and authorised repairers, employees, representatives and contractors only for the purpose of the technical diagnosis, research and development of the vehicle.


Keys

Emergency Key

The emergency key is used for an emergency.

- To unlock the seat.  P. 134

Do not store the emergency key in any compartment.

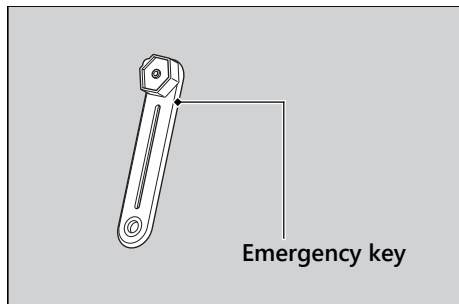

Honda SMART Key

Carrying the Honda SMART Key allows you to perform the following operations:

- Locking or unlocking the ignition switch
- Releasing the seat lock
- Opening the fuel lid
- Locking or unlocking the steering

The ID number of the Honda SMART Key is on the ID tag. You can also unlock the ignition switch by inputting the ID number.

Always carry both the emergency key and ID tag, but separate from the Honda SMART Key, to avoid losing all of them at the same time.

Also store a copy of your ID number in a safe place other than your vehicle.

The Honda SMART Key contains electronic circuits. If the circuits are damaged, the Honda SMART Key will not allow you to perform any operations.


- Do not drop the Honda SMART Key or set heavy objects on them.
- Protect the Honda SMART Key from direct sunlight, high temperature, and high humidity.
- Do not scratch or puncture.
- Do not store near any magnetized products such as a magnetized key chain.
- Always keep the Honda SMART Key away from electric appliances such as a TV, radio, PC or low-frequency massage device.
- Keep the Honda SMART Key away from liquids. If it gets wet, dry it immediately with a soft cloth.
- Keep the Honda SMART Key away from the vehicle while washing the vehicle.
- Do not burn.
- Do not wash in an ultrasonic cleaner.

- If fuel, wax, or grease adhere to the Honda SMART Key, wipe it off immediately to avoid cracking or warping.
- Do not disassemble the Honda SMART Key other than when changing a battery. Only the cover of the Honda SMART Key can be disassembled. Do not disassemble other parts.
- Do not lose your Honda SMART Key. If you lose it, you will need to register a new Honda SMART Key. See your dealer with your emergency key and ID tag for registration.

The battery in the Honda SMART Key system normally lasts about 2 years.

Do not keep mobile phones or other radio transmitting devices in any compartment. The radio frequency from the devices will interrupt the Honda SMART Key system.

To get an additional Honda SMART Key, take the Honda SMART Key and the vehicle to your dealer.

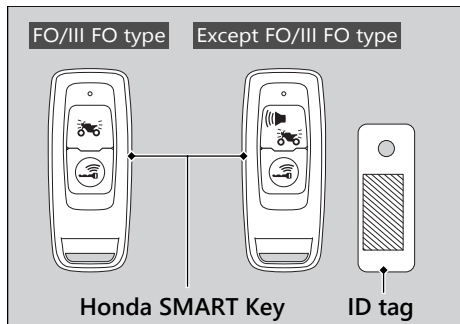

Taiwan only

根據 LP0002 低功率射頻器材技術規範 _ 章節 3.8.2: 取得審驗證明之低功率射頻器材，非經核准，公司、商號或使用者均不得擅自變更頻率、加大功率或變更原設計之特性及功能。

低功率射頻器材之使用不得影響飛航安全及干擾合法通信；經發現有干擾現象時，應立即停用，並改善至無干擾時方得繼續使用。

前述合法通信，指依電信管理法規定作業之無線電通信。

低功率射頻器材須忍受合法通信或工業、科學及醫療用電波輻射性電機設備之干擾。

Korea only

table { border: 1px solid black; padding: 5px; }
tr>
 신청자명칭 : | Honda Lock || 기자재 명 칭 : | 미약전계강도 무선기기 특정소출력 무선기기 (데이터 전송용 무선기기) |
기본모델명 :	HLSS-6A
제조사 :	Honda Lock Mfg. Co., Ltd
제조국가 :	Vietnam (베트남)

Thailand only

เครื่องวิทยุคมนาคมและอุปกรณ์นี้
มีความสอดคล้องตามข้อกำหนดของ กสทช.



เครื่องวิทยุคมนาคมนี้ ได้รับยกเว้น ไม่ต้องได้
รับใบอนุญาตให้มี ใช้ซึ่งเครื่องวิทยุคมนาคม
หรือตั้งสถานีวิทยุคมนาคมตามประกาศ กสทช.
เรื่อง เครื่องวิทยุคมนาคม และสถานีวิทยุ
คมนาคมที่ได้รับยกเว้นไม่ต้องได้รับใบอนุญาต
วิทยุคมนาคมตามพระราชบัญญัติวิทยุคมนาคม
พ.ศ. 2498



กสทช. | โทรคมนาคม

กำกับดูแลเพื่อประชาชน
Call Center 1200 (โทรฟรี)

Singapore only

Complies with
IMDA Standards
C080226241

Instruments, Controls, & Other Features

Ignition Switch

Leaving the ignition switch in the **I** (On) position with the engine stopped will drain the battery.

Do not turn the ignition switch while riding.

Engine Stop Switch

Do not use the engine stop switch except in an emergency. Doing so when riding will cause the engine to suddenly turn off, making riding unsafe.

If you stop the engine using the engine stop switch, turn the ignition switch to the **O** (Off) position. Failing to do so will drain the battery.

Odometer

The display remains at 999,999 when the odometer exceeds 999,999.

Tripmeter

Each tripmeter resets to 0.0 when the trip mileage exceeds 9,999.9.

Document Bag

The owner's manual, registration, and insurance information can be stored in the plastic document bag located reverse side of the seat.

Ignition Cut-off System

A banking (lean angle) sensor automatically stops the engine and fuel pump if the vehicle falls over. To reset the sensor, you must turn the ignition switch to the **O** (Off) position and back to the **I** (On) position before the engine can be restarted.

Honda Smartphone Voice Control system

Taiwan only

- Product name/Equipment Type : BT Unit
- Model name (commercial, the one which will appear in the certificate) : SAB 01
- Trade mark or applicant name : VISTEON CORPORATION One Village Center Drive, Visteon Village, Van Buren Township, MI 48111 United

取得審驗證明之低功率射頻器材，非經核准，公司、商號或使用者均不得擅自變更頻率、加大功率或變更原設計之特性及功能。

低功率射頻器材之使用不得影響飛航安全及干擾合法通信；經發現有干擾現象時，應立即停用，並改善至無干擾時方得繼續使用。前述合法通信，指依電信管理法規定作業之無線電通信。

低功率射頻器材須忍受合法通信或工業、科學及醫療用電波輻射性電機設備之干擾。

Thailand only



nabp.

เครื่องวิทยุคมนาคมนี้ ได้รับยกเว้น ไม่ต้องได้รับใบอนุญาตให้มี ใช้ซึ่งเครื่องวิทยุคมนาคม หรือตั้งสถานีวิทยุคมนาคมตามประกาศ กสทช. เรื่อง เครื่องวิทยุคมนาคม และสถานีวิทยุคมนาคมที่ได้รับยกเว้นไม่ต้องได้รับใบอนุญาตวิทยุคมนาคมตามพระราชบัญญัติวิทยุคมนาคม พ.ศ. 2498



nabp. | โทรคมนาคม

กำกับดูแลเพื่อประชาชน

Call Center 1200 (Inswr)

Caring for Your Vehicle

Frequent cleaning and polishing is important to ensure the life of your Honda. A clean vehicle makes it easier to spot potential problems. In particular, seawater and salts used to prevent ice on roads promote the formation of corrosion. Always wash your vehicle thoroughly after riding on coastal or treated roads.

Washing

Allow the engine, muffler, brakes, and other high-temperature parts to cool before washing.

1. Rinse your vehicle thoroughly using a low pressure garden hose to remove loose dirt.
2. If necessary, use a sponge or a soft towel with mild cleaner to remove road grime.
 - ▶ Clean the windscreen, headlight lens, panels, and other plastic components with extra care to avoid scratching them. Avoid directing water into the air cleaner, muffler, and electrical parts.

3. Thoroughly rinse your vehicle with plenty of clean water and dry with a soft, clean cloth.
4. After the vehicle dries, lubricate any moving parts.
 - ▶ Make sure that no lubricant spills onto the brakes or tyres. Brake discs, pads, drum or shoes contaminated with oil will suffer greatly reduced braking effectiveness and can lead to a crash.
5. Apply a coat of wax to prevent corrosion.
 - ▶ Avoid products that contain harsh detergents or chemical solvents. These can damage the metal, paint, and plastic on your vehicle.
Keep the wax clear of the tyres and brakes.
 - ▶ If your vehicle has any mat painted parts, do not apply a coat of wax to the mat painted surface.

I Washing Precautions

Follow these guidelines when washing:

- Do not use high-pressure washers:
 - ▶ High-pressure water cleaners can damage moving parts and electrical parts, rendering them inoperable.
 - ▶ Water in the air intake can be drawn into the throttle body and/or enter the air cleaner.
 - Do not direct water at the muffler:
 - ▶ Water in the muffler can prevent starting and causes rust in the muffler.
 - Dry the brakes:
 - ▶ Water adversely affects braking effectiveness. After washing, apply the brakes intermittently at low speed to help dry them.
 - Do not direct water under the seat:
 - ▶ Water in the under seat compartment can damage your documents and other belongings.
-
- Do not direct water at the air cleaner:
 - ▶ Water in the air cleaner can prevent the engine from starting.
 - Do not direct water near the headlight:
 - ▶ The headlight's inside lens may fog temporarily after washing or while riding in the rain. This does not impact the headlight function.
However, if you see a large amount of water or ice accumulated inside the lens(es), have your vehicle inspected by your dealer.
 - Do not use wax or polishing compounds on mat painted surfaces:
 - ▶ Use a soft cloth or sponge, plenty of water, and a mild detergent to clean mat painted surfaces. Dry with a soft clean cloth.

Aluminium Components

Aluminium will corrode from contact with dirt, mud, or road salt. Clean aluminium parts regularly and follow these guidelines to avoid scratches:

- Do not use stiff brushes, steel wool, or cleaners containing abrasives.
- Avoid riding over or scraping against curbs.

Panels

Follow these guidelines to prevent scratches and blemishes:

- Wash gently using a soft sponge and plenty of water.
- To remove stubborn stains, use diluted detergent and rinse thoroughly with plenty of water.
- Avoid getting petrol, brake fluid, or detergents on the instruments, panels, or headlight.

Windscreen

Using plenty of water, clean the windscreen with a soft cloth or sponge. (Avoid using detergents or any kind of chemical cleaner on the windscreen.) Dry with a soft, clean cloth.

NOTICE

To avoid possible scratching or other damage, use only water and a soft cloth or sponge to clean the windscreen.

For a dirtier windscreen, use a diluted neutral detergent with a sponge and plenty of water. Make sure to wash off all the detergent. (Detergent residue may cause windscreen cracks.)

Replace the windscreen if scratches cannot be removed and they obstruct clear vision.

Take care to keep battery electrolyte, brake fluid, or other chemical solvents off the windscreen and screen garnish. They will damage the plastic.

Exhaust Pipe and Muffler

The exhaust pipe and muffler are stainless steel but may become stained by mud or dust.

To remove mud or dust, use a wet sponge and a liquid kitchen abrasive, then rinse well with clean water. Dry with chamois or a soft towel.

If necessary, remove heat stains by using a commercially available fine texture compound. Then, rinse by the same manner as removing mud or dust.

If the exhaust pipe and muffler are painted, do not use a commercially available abrasive kitchen cleaning compound. Use a neutral detergent to clean the painted surface on the exhaust pipe and muffler. If you are not sure if your exhaust pipe and muffler are painted, contact your dealer.

NOTICE

Even though the exhaust is made of stainless steel, it can become stained. Remove all marks and blemishes as soon as they are noticed.

Storing Your Vehicle

If you store your vehicle outdoors, you should consider using a full-body cover.

If you won't be riding for an extended period, follow these guidelines:

- Wash your vehicle and wax all painted surfaces (except mat painted surfaces). Coat chrome pieces with rust-inhibiting oil.
- Place your vehicle on its centre stand and position a block so that both tyres are off the ground.
- After rain, remove the body cover and allow the vehicle to dry.
- Remove the battery (➡ P. 107) to prevent discharge. Fully charge the battery and then place it in a shaded, well-ventilated area.
 - ▶ If you leave the battery in place, disconnect the negative ⊖ terminal to prevent discharge.

After removing your vehicle from storage, inspect all maintenance items required by the Maintenance Schedule.

Transporting Your Vehicle

If your vehicle needs to be transported, it should be carried on a motorcycle trailer or a flatbed truck or trailer that has a loading ramp or lifting platform and motorcycle tie-down straps. Never try to tow your vehicle with a wheel or wheels on the ground.

NOTICE

Towing your vehicle with a wheel or wheels on the ground can cause serious damage to the transmission.

You & the Environment

Owning and riding a vehicle can be enjoyable, but you must do your part to protect the environment.

Choose Sensible Cleaners

Use a biodegradable detergent when you wash your vehicle. Avoid aerosol spray cleaners that contain chlorofluorocarbons (CFCs) which damage the atmosphere's protective ozone layer.

Recycle Wastes



Put oil and other toxic wastes in approved containers and take them to a recycling centre. Call your local or state office of public works or environmental services to find a recycling centre in your area and to get instructions on how to dispose of non-recyclable wastes. Do not place used engine oil in the trash or pour it down a drain or on the ground. Used oil, petrol, coolant, and cleaning solvents contain poisons that can hurt refuse workers and contaminate drinking water, lakes, rivers, and oceans.

Serial Numbers

The frame and engine serial numbers uniquely identify your vehicle and are required in order to register your vehicle. They may also be required when ordering replacement parts.

To check the frame number, open the seat (➤ P. 84) and remove the frame number lid.

You should record these numbers and keep them in a safe place.

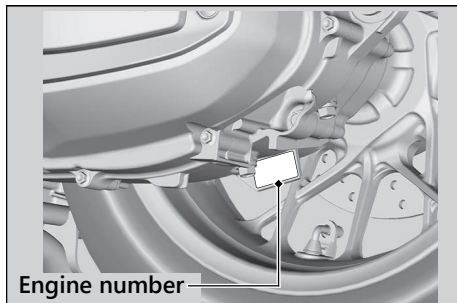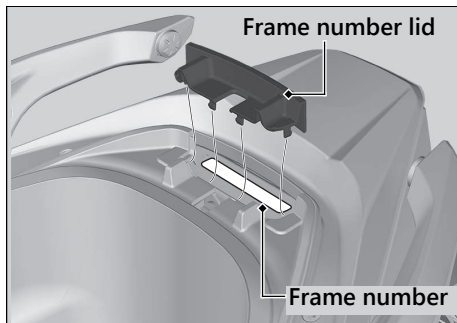

Fuels Containing Alcohol

Some conventional fuels blended with alcohol are available in some locales to help reduce emissions to meet clean air standards. If you plan to use blended fuel, check that it is unleaded and meets the minimum octane rating requirement.

TH/III TH type only

The following fuel blends can be used in your vehicle:

- Ethanol (ethyl alcohol) up to 20% by volume.
 - ▶ Petrol containing ethanol may be marketed under the name Gasohol.

NOTICE

Use of blended fuels containing higher than approved percentages can damage metal, rubber, plastic parts of your fuel system.

If you notice any undesirable operating symptoms or performance problems, try a different brand of petrol.

Except TH/III TH type

The following fuel blends can be used in your vehicle:

- Ethanol (ethyl alcohol) up to 10% by volume.
 - ▶ Petrol containing ethanol may be marketed under the name Gasohol.

The use of petrol containing more than 10% ethanol may:

- Damage the painting of the fuel tank.
- Damage the rubber tubes of the fuel line.
- Cause corrosion of the fuel tank.
- Cause poor drivability.

NOTICE

Use of blended fuels containing higher than approved percentages can damage metal, rubber, plastic parts of your fuel system.

If you notice any undesirable operating symptoms or performance problems, try a different brand of petrol.

Catalytic Converter

This vehicle is equipped with two three-way catalytic converters. Each catalytic converter contains precious metals that serve as catalysts in high temperature chemical reactions that convert hydrocarbons (HC), carbon monoxide (CO), and oxides of nitrogen (NOx) in the exhaust gases into safe compounds.

A defective catalytic converter contributes to air pollution and can impair your engine's performance. A replacement unit must be an original Honda part or equivalent.

Follow these guidelines to protect your vehicle's catalytic converters:

- Always use unleaded petrol. Leaded petrol will damage the catalytic converters.
- Keep the engine in good running condition.
- Have your vehicle serviced if your engine is misfiring, backfiring, stalling, or otherwise not running properly, stop riding and turn off the engine.

Specifications

■ Main Components

Overall length	2,200 mm (86.6 in)	
Overall width	895 mm (35.2 in)	
Overall height	Windscreen position	
	Lowest	Except III SI/TH/III TH type 1,295 mm (51.0 in)
		III SI/TH/III TH type 1,296 mm (51.0 in)
		Highest 1,430 mm (56.3 in)
Wheelbase	Except III SI/TH/III TH type 1,520 mm (59.8 in)	
	III SI/TH/III TH type 1,518 mm (59.8 in)	
Minimum ground clearance	FO/III FO/KO/MA type 145 mm (5.7 in)	
	III HK/III SI/TH/III TH type 155 mm (6.1 in)	
Caster angle	Except KO/MA type	26° 30'
	KO/MA type	26.5°
Trail	90 mm (3.5 in)	
Curb weight	Except KO type	186 kg (410 lb)
	KO type	185 kg (408 lb)
Maximum weight capacity *1	Except KO type	180 kg (397 lb)
	KO type	160 kg (353 lb)
Maximum luggage weight *2	16.5 kg (36 lb)	
	Luggage box	10 kg (22 lb)
	Glove box	1.5 kg (3.3 lb)

Passenger capacity	Rider and 1 passenger
Minimum turning radius	2.4 m (7.9 ft)
Displacement	Except III SI/TH/III TH type 330 cm ³ (20.1 cu-in)
	III SI/TH/III TH type 329.60 cm ³ (20.106 cu-in)
	Except III SI/TH/III TH type 77.0 x 70.8 mm (3.03 x 2.79 in)
Bore x stroke	III SI/TH/III TH type 77.000 x 70.766 mm (3.0315 x 2.7861 in)
Compression ratio	10.5:1
Fuel	Unleaded petrol Recommended: 91 RON or higher
Fuels containing alcohol	Except TH/III TH type ETHANOL up to 10% by volume
	TH/III TH type ETHANOL up to 20% by volume
Tank capacity	11.7 L (3.09 US gal, 2.57 Imp gal)
Battery	FTZ10S
	12 V-8.6 Ah (10 HR)
	YTZ10 12 V-8.6 Ah (10 HR)
Primary reduction	CVT (2.42:1 ~ 0.8:1)
Final reduction	7.682

*1: Including rider, passenger, all luggage, and accessories.

*2: Includes the weight of the luggage and added accessories.

■ Service Data

Tyre size	Front	120/70-15 M/C 56P	
	Rear	140/70-14 M/C 62P	
Tyre type		Bias-ply, tubeless	
Recommended Tyre	Front	METZELER	KAROO™ STREET
	Rear	METZELER	KAROO™ STREET
Tyre air pressure	Front	200 kPa (2.00 kgf/cm ² , 29 psi)	
	Rear	225 kPa (2.25 kgf/cm ² , 33 psi)	
Minimum tread depth	Front	1.5 mm (0.06 in)	
	Rear	2.0 mm (0.08 in)	
Spark plug	(standard)	LMAR8L-9 (NGK)	
Spark plug gap	0.8 - 0.9 mm (0.03 - 0.04 in)		
Idle speed	1,500 ± 100 rpm		
Recommended engine oil	Honda 4-stroke motorcycle oil API Service Classification SJ or higher, excluding oils marked as "Energy Conserving" or "Resource Conserving," SAE 10W-30, JASO T 903 standard MB		

Engine oil capacity	After draining	1.3 L (1.4 US qt, 1.1 Imp qt)
	After draining & engine oil filter change	1.5 L (1.6 US qt, 1.3 Imp qt)
	After disassembly	1.8 L (1.9 US qt, 1.6 Imp qt)
Transmission oil capacity	After draining	0.17 L (0.18 US qt, 0.15 Imp qt)
	After disassembly	0.20 L (0.21 US qt, 0.18 Imp qt)
Recommended brake fluid	Honda DOT 4 Brake Fluid	
Cooling system capacity	Except MA type	1.01 L (1.07 US qt, 0.89 Imp qt)
	MA type	1 L (1 US qt, 1 Imp qt)
	KO type	
Recommended coolant	Pro Honda HP Coolant	
	Except KO type	HONDA PRE-MIX COOLANT

Specifications

■ Bulbs

Headlight	LED
Brakelight/Taillight	LED
Front turn signal	LED
Rear turn signal	LED
License plate light	LED
Position light	LED

■ Fuses

Main fuse	30 A
Other fuse	30 A, 15 A, 10 A, 7.5 A

Thailand only

HELMET CAUTION LABEL

⚠ คำเตือน

อาจถึงตายหรือพิการ หากไม่สวม
หมวกนิรภัย และไม่ควรให้เด็ก
ที่เท้ายังไม่ถึงที่วางเท้าโดยสาร

Online Owner's Manual
<https://www.hondamotopub.com/>



32K2LB10
00X32-K2L-B100

XXXX.20XX.XX.P
PRINTED IN XXXXX